



PHGS Project – Dust Emissions Assessment

Air Quality Modelling Assessment

Final Report
Version 1

Prepared for Port Hedland Green Steel Pty Ltd

December 2024

Project Number: 1385

PHGS Project – Dust Emissions Assessment

Final Report

DOCUMENT CONTROL

Version	Description	Date	Author	Reviewer
A	Draft for Client Review	16.08.2024	ETA (AG)	ETA (JH)
B	Updated draft for client review	11.12.2024	ETA (AG)	ETA (JH)
1	Final	18.12.2024	ETA (JH)	Preston

Approval for Release

Name	Position	File Reference
Jon Harper	Director /Principal Air Quality Specialist	1385 Port Hedland Green Steel Air Quality Ver1
Signature		

Copyright © 2024 Environmental Technologies & Analytics Pty Ltd. All rights reserved.

This document has been prepared for Port Hedland Green Steel Pty Ltd on the basis of instructions and information provided. The report may therefore be subject to qualifications, which are not expressed. Environmental Technologies & Analytics Pty Ltd has no liability to any other person who acts or relies upon any information contained in this document without confirmation. This document is uncontrolled unless it is an original, signed copy.

Executive Summary

Port Hedland Green Steel Pty Ltd is evaluating the feasibility of developing a large-scale downstream processing capability at the Boodarie Strategic Industrial Area (BSIA) in Port Hedland, Western Australia. This development, the Port Hedland Green Steel Project (the Project), will source magnetite concentrate from iron ore operations in the Pilbara to produce Hot Briquetted Iron (HBI) for export to customers who will convert the HBI into a low carbon emission steel overseas. Port Hedland Green Steel Pty Ltd has commissioned Preston Consulting Pty Ltd (Preston Consulting) to engage and contract all relevant environmental studies.

The Project will be developed in stages, with Stage 1 consisting of developing the Iron Ore Processing Facility consisting of a Pellet Plant which will consume approximately 3 - 3.5 million tonnes per annum (Mtpa) of iron ore (trucked in from iron ore operations in the Pilbara) and a HBI Plant which will further process approximately 2 Mtpa of the pellets into HBI. The disturbance footprint for Stage 1 of the Project will likely be around 300 – 400 hectares (ha) within the BSIA.

Port Hedland Green Steel Pty Ltd plan to seek approval under Part IV of the *Environmental Protection Act 1986* (EP Act) to enable the development of the Project.

Overview of assessment

The potential impacts were determined through a dispersion modelling study, which incorporated site-specific meteorological data, emissions information, source characteristics, and the location of model receptors. An inventory of particulate (dust) emissions from the current operations was developed and projected for the change in operations.

Emission rates for the Project were undertaken using source specific emission factors, while the emissions for the transfer of materials were undertaken with emission factors sourced from the NPI Emission Estimation Technique Manual (EETM) for Mining. The study adopted a conservative approach, consistent with similar assessments in the region, using AERMOD software (version 9.4).

Ground-level particulates (as PM₁₀ concentrations) were predicted at sensitive receptors and the surrounding environment using the Port Hedland Industries Council Cumulative Air Model (AERMOD) and were compared with the relevant air quality assessment criteria. Predicted project contributions were presented in isolation of non-project related emission sources, and with the inclusion of background and existing concentrations to represent the potential changes in cumulative impacts in the Port Hedland area.

Key findings

Modelling was undertaken for:

- A stand-alone scenario where 3.5 million tonnes of Ore was processed into pellets and 2 million tonnes were further processed into hot briquettes (HBI).
- A cumulative model combining the stand-alone scenario with the existing PHIC cumulative emissions.

The results of the modelling, at selected receptors, predict for the:

- Standalone scenario (i.e. The Project in isolation of other emission sources and no background):
 - For PM₁₀:

- At the Taplin St receptor all of the predicted 24-hour averaged PM₁₀ concentrations are below 1 µg/m³.
 - The highest predicted impact will be 3.2 µg/m³ at the South Hedland receptor, with the lower percentile results being significantly lower.
- For PM_{2.5}:
 - At the Taplin St receptor all of the predicted 24-hour averaged PM_{2.5} concentrations are well below 1 µg/m³.
- Scenario 3 which is a cumulative model of the PHIC network including the Project with background, for both PM₁₀ and PM_{2.5}:
 - There is no predicted change to the number of excursion of the criteria at the Taplin St receptor
 - There is no predicted change to the maximum predicted 24-hour concentration at the Taplin St receptor.
 - There are no predicted changes to the maximum predicted 24-hour concentration at either the Wedgefield or South Hedland receptors.

Table of Contents

1	Introduction	1
1.1	Background	1
1.2	Scope of work	1
1.3	Structure of report	3
2	Assessment methodology	4
2.1	Dispersion Modelling	4
2.2	AERMOD Modelling	4
2.3	Meteorological File	5
2.4	Grid system	5
2.5	Air quality assessment criteria	7
2.6	Background concentrations	8
2.7	Model uncertainty.....	11
3	Emissions to air estimation	12
3.1	Emission Sources.....	12
3.2	Emission estimates.....	14
3.2.1	Unloading ore	14
3.2.2	Handling and transferring.....	14
3.2.3	Loading ore	14
3.2.4	Wind erosion	14
3.3	Emission Controls.....	15
3.3.1	Emission summary.....	16
3.4	Cumulative Scenario	16
4	Predicted air quality impact	17
4.1	Scenario 1: Base Case.....	17
4.1.1	PM ₁₀	17
4.1.2	PM _{2.5}	21

4.2	Scenario 2: Port Hedland Green Steel only	24
4.2.1	PM ₁₀	24
4.2.2	PM _{2.5}	27
4.3	Scenario 3: Cumulative Operations.....	30
4.3.1	PM ₁₀	30
4.3.2	PM _{2.5}	33
4.4	Comparison at Taplin St	36
5	Conclusions	37
6	References	38
7	Acronyms and Glossary	39
8	Appendices	40

Tables

Table 2-1: Receptors, and locations, used in assessment

Table 2-2: Ambient Air Quality Standards and Goals

Table 2-3: Number of annual excursions of the PM₁₀ NEPM criteria at Yule River

Table 2-4: Statistics of 24-hour PM₁₀ PHIC CAM background file

Table 2-5: Determining background PM_{2.5} from PM₁₀ concentrations.

Table 3-1: Dust abatement in place (included in model)

Table 3-2: Total estimated emissions for modelled scenarios

Table 4-1: Predicted 24-hour average ground level concentrations of PM₁₀ at Receptors for Scenario 1 with background (µg/m³)

Table 4-2: Predicted 24-hour average ground level concentrations of PM_{2.5} at Receptors for Scenario 1 with background (µg/m³)

Table 4-3: Predicted 24-hour ground level concentrations of PM₁₀ at Receptors for Scenario 2 (µg/m³)

Table 4-4: Predicted 24-hour average ground level concentrations of PM_{2.5} at Receptors for Scenario 2 without background (µg/m³)

Table 4-5: Predicted 24-hour ground level concentrations of PM₁₀ at Receptors for Scenario 3 (µg/m³) with background

Table 4-6: Predicted 24-hour average ground level concentrations of PM_{2.5} at Receptors for Scenario 3 with background (µg/m³)

Table 4-7: Predicted 24-hour ground level concentrations of PM₁₀ at Taplin St for the Project – 3.5 Mtpa

Figures

Figure 1-1: Project location and setting.

Figure 2-1: Location of receptors used in assessment.

Figure 2-2: PHIC CAM background PM₁₀ 24-hour concentrations (µg/m³).

Figure 3-1: Location of dust emissions sources at the Project.

Figure 4-1: Maximum 24-hour PM₁₀ concentrations for PHIC existing and cumulative model

Figure 4-2: Annual average PM₁₀ concentrations for PHIC existing and cumulative model

Figure 4-3: Indicative maximum 24-hour PM_{2.5} concentrations for PHIC existing and cumulative model

Figure 4-4: Indicative annual average PM_{2.5} concentrations for PHIC existing and cumulative model

Figure 4-5: Maximum 24-hour PM₁₀ concentrations for Scenario 2: the Project (µg/m³)

Figure 4-6: Annual average PM₁₀ concentrations for Scenario 2: the Project (µg/m³)

Figure 4-7: Indicative maximum 24-hour PM_{2.5} concentrations for Scenario 2: the Project (µg/m³)

Figure 4-8: Indicative annual average PM_{2.5} concentrations for Scenario 2: the Project (µg/m³)

Figure 4-9: Maximum 24-hour PM₁₀ concentrations for Scenario 3: PHGS + PHIC (µg/m³)

Figure 4-10: Annual average PM₁₀ concentrations for Scenario 3: PHGS + PHIC (µg/m³)

Figure 4-11: Indicative maximum 24-hour PM_{2.5} concentrations for PHIC existing and cumulative model

Figure 4-12: Indicative annual average PM_{2.5} concentrations for PHIC existing and cumulative model

1 Introduction

1.1 Background

Port Hedland Green Steel Pty Ltd (PHGS) is evaluating the feasibility of developing a large-scale downstream processing capability at the Boodarie Strategic Industrial Area (BSIA) in Port Hedland, Western Australia. This development, the Australia Green Steel Project (the Project), will source magnetite concentrate from iron ore operations in the Pilbara to produce Hot Briquetted Iron (HBI) for export to customers who will convert the HBI into a low carbon emission steel overseas.

The Project will be developed in stages, with Stage 1 consisting of developing the Iron Ore Processing Facility consisting of a Pellet Plant which will consume approximately 3 - 3.5 million tonnes per annum (Mtpa) of iron ore (trucked in from iron ore operations in the Pilbara) and a HBI Plant which will further process approximately 2 Mtpa of the pellets into HBI. The disturbance footprint for Stage 1 of the Project will likely be around 300 – 400 hectares (ha) within the BSIA. PHGS plan to seek approval under Part IV of the *Environmental Protection Act 1986* (EP Act) to enable the development of the Project.

1.2 Scope of work

The scope of work includes:

- Development of an emissions inventory for Stage 1:
 - Particulate emissions associated with material handling including truck unloading, stacking, reclaiming and associated transfer stations and conveyors.
 - Particulate emissions associated with both the proposed Pellet and HBI plants.
- Atmospheric dispersion modelling for the proposed emission scenario.
 - The modelling will be undertaken using the updated PHIC CAM (AERMOD), with relevant modelling files provided by PHIC.
 - This will include the validated meteorological and background data as well as specified model configurations and in accordance with the Air Quality Modelling Guidance Notes (DER, 2006).
- The modelled results will be compared to the interim air quality criteria as detailed in the '*Port Hedland Regulatory Strategy, 2021*'.

The scenarios considered are:

- Scenario 1: Base case, PHIC network emissions with background (not including Port Hedland Green Steel)
- Scenario 2: The Project without background
- Scenario 3: Cumulative model of PHIC and the Project with background.

This report outlines the methodology for the emission estimation and atmospheric modelling of the predicted dust impacts associated with the Project. The report presents the predicted ground level concentrations of dust with the proposed project and makes comparison to the dust performance targets specified in the Port Hedland Regulatory Strategy (DWER, 2021). Further reference is also made to the Department of Water and Environmental Regulation (DWER) Industry Regulation fact sheet 'Managing dust in Port Hedland' (DWER, 2018). Modelling of potential cumulative emissions was also undertaken as part of this assessment. Emissions from the BHP operations at Nelson Point and Finucane Island, Pilbara Ports Authority (PPA) Utah Point (multi-user operations, Roy Hill Facility, and the Fortescue Metals Group (Fortescue) operations at Anderson Point.

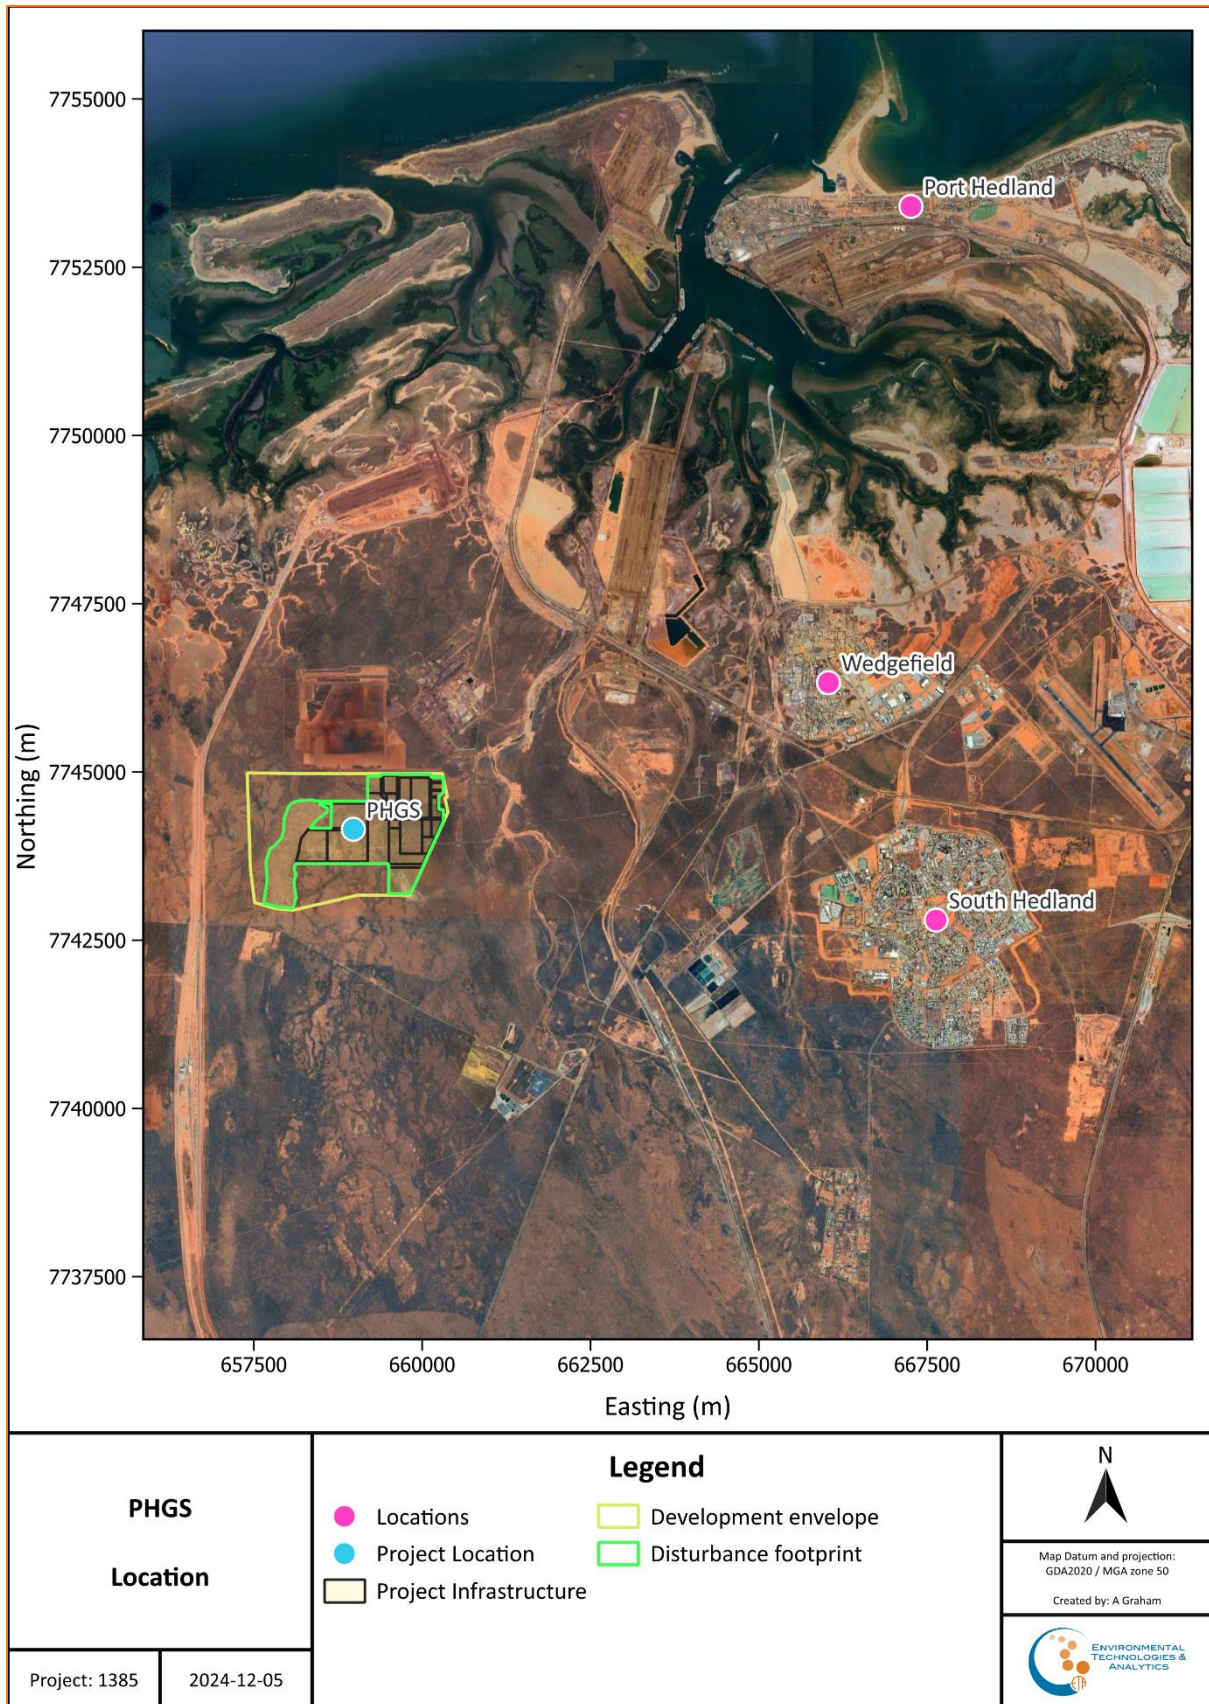


Figure 1-1: Project location and setting.

1.3 Structure of report

This report describes the methods and findings of an assessment of the potential impacts to the air environment arising from the Project. The assessment includes:

- The study approach and methodology in Section 2.
- Project emission estimation and inventory in Section 3.
- An evaluation of the predicted ground-level concentrations and interpretation of the potential impact of the Project (Section 4)
- Conclusions of the assessment presented in Section 5.

The appendices contain supporting information.

2 Assessment methodology

The following section outlines the methodology utilised in the assessment of the potential changes in the air quality resulting from the proposed development of the Project.

2.1 Dispersion Modelling

During 2014 and 2015 the Port Hedland Industries Council (PHIC) undertook an extensive atmospheric dispersion model validation project where it was determined that both AERMOD and CALPUFF were suitable models to determine the potential impact from industrial sources in the area. In brief:

- AERMOD is the acronym or common name for the AERMIC Dispersion Model. It was designed by the AERMIC Committee (the American Meteorological Society/Environmental Protection Agency Regulatory Model Improvement Committee) to treat elevated and surface emission sources in terrain that is simple or complex (Perry, Cimorelli et al, 2005). In 2013 AERMOD replaced AUSPLUME as the regulatory model for air quality assessments in Victoria by the Victorian Environmental Protection Authority (EPAV).
- CALPUFF is the dispersion module of the CALMET/CALPUFF suite of models. It is a multi-layer, multi species, non-steady-state puff dispersion model that can simulate the effects of time-varying and space-varying meteorological conditions on pollutant transport, transformation and removal. The model contains algorithms for near-source effects such as building downwash, partial plume penetration, sub-grid scale interactions as well as longer range effects such as pollutant removal, chemical transformation, vertical wind shear and coastal interaction effects. The model employs dispersion equations based on a Gaussian distribution of pollutants across released puffs and considers the complex arrangement of emissions from point, area, volume and line sources (Scire et al., 2008).

2.2 AERMOD Modelling

For this assessment, the dispersion model AERMOD (version 12) was used. The primary reason for using this model is that other proponents in the region, particularly BHP and Fortescue, are using AERMOD for their own approvals process. By using AERMOD this assessment ensures consistency in evaluating cumulative impact predictions with other assessments within the region.

The model was configured in accordance with the work undertaken as a part of the PHIC Cumulative Air Model (CAM) (PEL, 2015). As noted in the PHIC CAM report (PEL, 2015) there are some constraints that need to be considered when using the PHIC CAM (AERMOD) including:

- The model may over-predict concentrations at Richardson St.
- At the Kingsmill St and Taplin St receptors the model results are considered to be reasonable reflections of actual monitored air quality.
- The number of excursions of the interim target at Taplin St are considered to be reasonable reflections.

To undertake the air quality assessment, emission estimation and modelling were undertaken for the following scenarios:

- A stand-alone scenario where 3.5 million tonnes of Ore was processed into pellets and 2 million tonnes were further processed into hot briquettes (HBI).
- A cumulative model, with other existing, approved, and planned operations in the region including -
 - BHP at 330 Mtpa

- PPA at 28 Mtpa
- Fortescue at 210 Mtpa
- North West Infrastructure at 50 Mtpa
- Roy Hill Facility at 70Mtpa.

2.3 Meteorological File

The AERMOD modelling incorporated the meteorological file developed as part of the PHIC (CAM) project which has been accepted for use by the Western Australian (WA) Department of Water and Environment Regulation (DWER).

A summary of the stability and mixing heights of the PHIC CAM meteorological file is provided in Appendix A.

2.4 Grid system

The modelling undertaken as part of this assessment utilised the same receptors, and their locations, as that contained within the PHIC CAM report (PEL, 2015). These receptors, and their coordinates, are listed in Table 2-1 and presented graphically in Figure 2-1. Note that due to the number of receptors within the Town of Port Hedland the name of each receptor was not incorporated into the figure, instead each receptor has been assigned a number. These numbers correspond to those listed in Table 2-1.

Table 2-1: Receptors, and locations, used in assessment

Number	Receptor	Easting (m)	Northing (m)
1	Harbour	664,350	7,753,240
2	Richardson Street	664,763	7,753,402
3	BMX	665,281	7,753,352
4	Kingsmill Street	665,508	7,753,450
5	Historic Hospital Site	665,870	7,753,420
6	Taplin Street	667,030	7,753,435
7	St Celia's School	667,292	7,753,390
8	Holiday Inn	667,780	7,753,480
9	Shop	668,050	7,753,280
10	All Seasons Inn	668,140	7,753,530
11	Council	668,450	7,753,640
12	Neptune Place	669,441	7,754,077
13	Primary School	670,631	7,754,008
14	South Hedland	666,600	7,743,439
15	Wedgefield	665,526	7,747,107

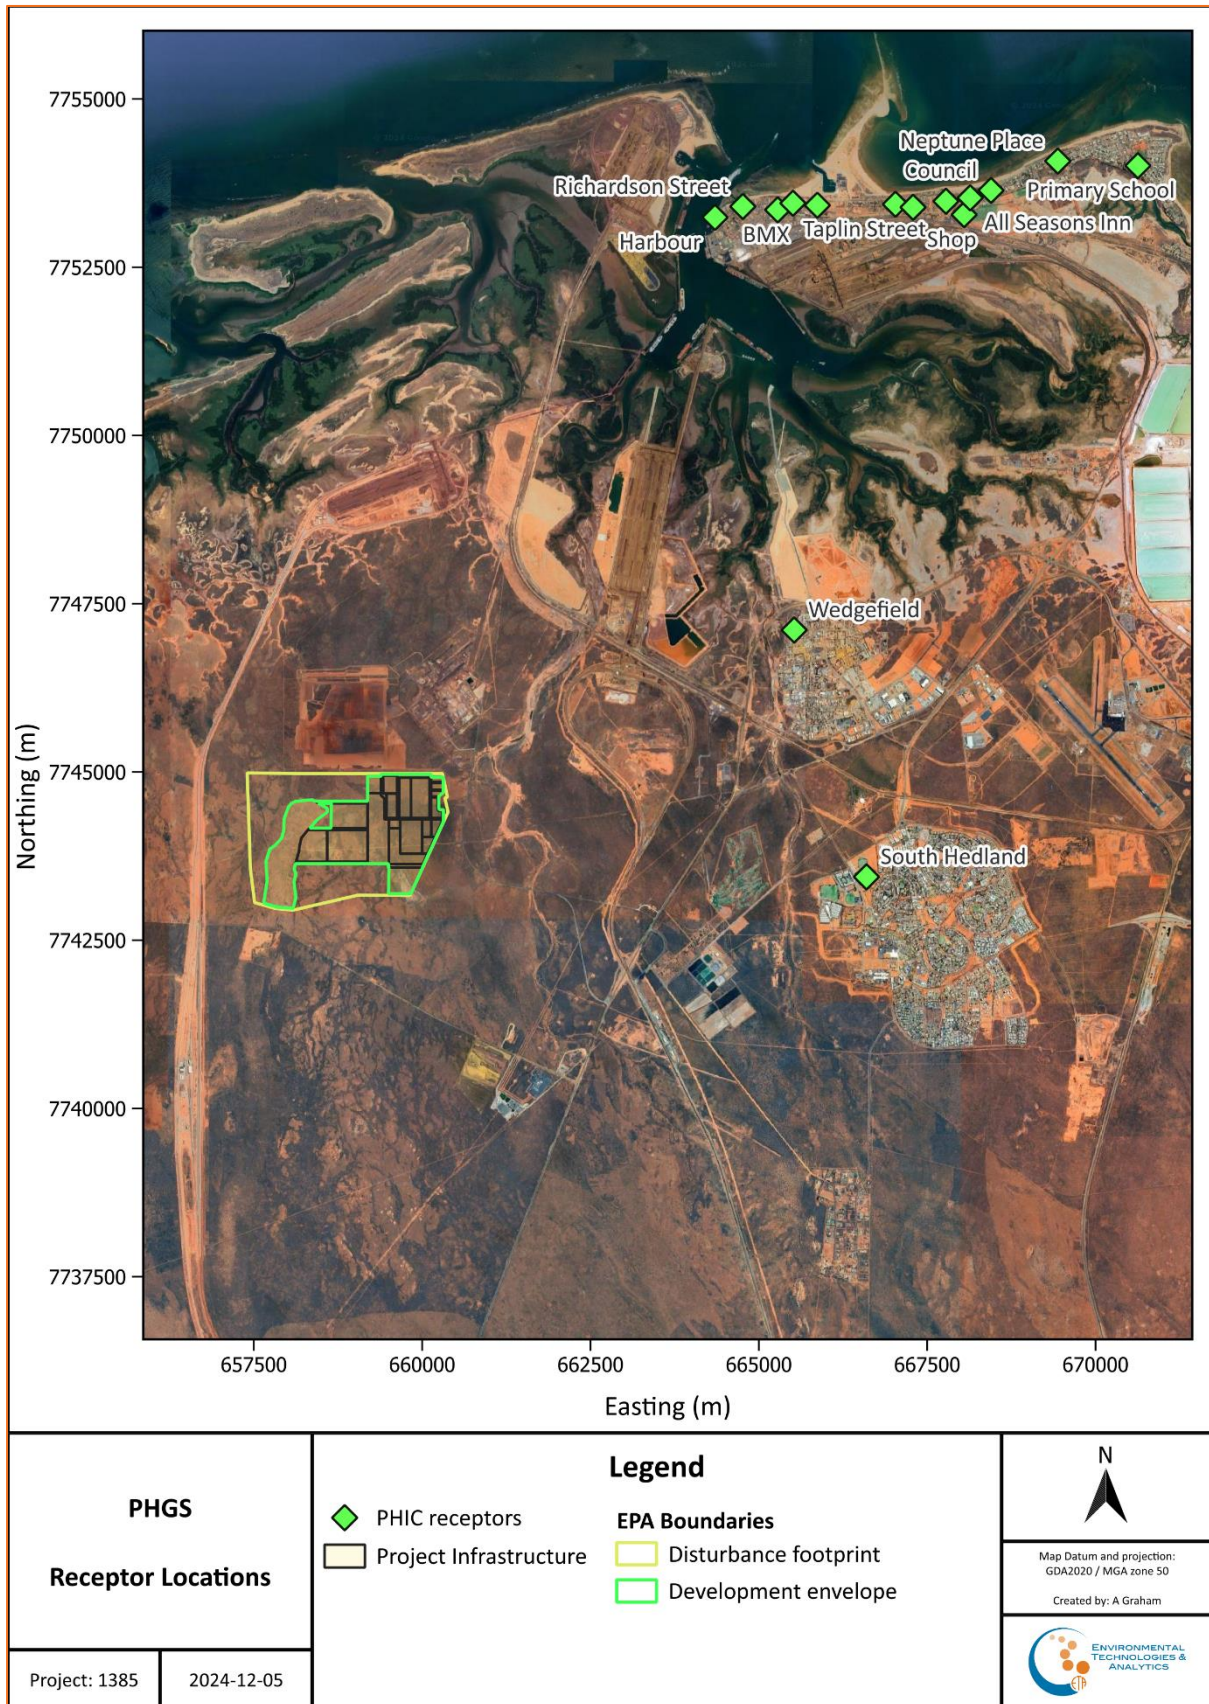


Figure 2-1: Location of receptors used in assessment.

2.5 Air quality assessment criteria

Modelled ground level concentrations for particulates have been compared to ambient air quality assessment criteria to determine the potential changes in impact resulting from the Project.

The assessment criteria adopted for this study (for particulates) are primarily based on the DWER (2019; 2021) guidelines, which also reference the numerical values from the ambient air quality standards specified in the Ambient Air Quality NEPM (NEPC, 2021).

In their current draft form, the DWER (2019) guidelines for PM₁₀/PM_{2.5} (defined as *criteria pollutants* in the guideline) require the criteria to generally be ‘...met at all existing and future offsite sensitive receptors in the modelling domain’. DWER (2021) draft guidelines address the settling or deposition of dust, noting that at time of this assessment the guideline is draft and subject to public consultation. The guidelines also state that the department may approve deviations to the assessment criteria on a case-by-case basis.

For Port Hedland specifically, the Port Hedland Regulatory Strategy (DWER, 2021) adopted the Dust Management Taskforce (Taskforce) interim guideline value of 70 µg/m³ for PM₁₀ (24-hour average) as an Air Guideline Value (AGV). This AGV applies to residential areas in Port Hedland, wherever people live on a permanent basis.

The ambient air quality assessment criteria adopted in this study are shown in Table 2-2.

Table 2-2: Ambient Air Quality Standards and Goals

Pollutant	Air quality assessment criteria					Reference
	Concentration ¹	Concentration ²	Averaging Period	Allowable Exceedances	Environmental value protected	
PM ₁₀	25 µg/m ³	23 µg/m ³	annual	none	Human health	DWER (2021) consistent with NEPM (NEPC, 2021)
	70 µg/m ³	-	24-hour average	Not more than 10 days a year		Taskforce criteria (DSD, 2016)
PM _{2.5}	25 µg/m ³	23 µg/m ³	24-hour	exception event	Human health	DWER (2021) consistent with NEPM (NEPC, 2021)
	8 µg/m ³	8 µg/m ³	annual	none		

Notes:

1 Concentrations referenced to 0°C

2 Concentrations referenced to 25°C

2.6 Background concentrations

It has long been recognised that the Pilbara region, due to its semi-arid climate, is a naturally dusty environment. This was highlighted in the aggregated emission study undertaken by SKM in 2000 (SKM, 2003) which calculated that the Pilbara region emitted approximately 170,000 tonnes of windblown particulates for the financial year 1999/2000. The naturally dusty environment is also apparent from the monitoring data from the PHIC Yule River monitor. This monitor is located approximately 42 kilometres (km) south-west of Port Hedland and is indicative of regional concentrations. The number of excursions of the 50 $\mu\text{g}/\text{m}^3$ NEPM criteria for particulates (as PM_{10}) for each financial year since 2012/2013 (FY13) are presented in Table 2-3.

From Table 2-3 it is apparent that there can be a large annual variation in the number of excursions of the NEPM PM_{10} criteria ranging from 24 in FY13 down to 1 in FY17 and FY22. This indicates that the quantity of particulates can vary significantly from year to year and that the background file used in the assessment should be considered as indicative only.

Table 2-3: Number of annual excursions of the PM_{10} NEPM criteria at Yule River

Financial Year	FY13	FY14	FY15	FY16	FY17	FY18	FY19	FY20	FY21	FY22	FY23
Number of excursions	24	8	18	5	1	8	15	13	8	1	20

For this assessment the PHIC CAM background file was utilised and the methodology for the development of this file is outlined in PEL (2015). The PEL (2015) report also noted that due to the way the file was calculated there is a high probability that not all fugitive sources within the Port Hedland region were accounted for. This provides further indication that the file should be considered as indicative only. The 24-hour statistics for the PHIC CAM background file are presented in Table 2-4 and presented graphically in Figure 2-2. From this table it is apparent that the maximum 24-hour concentration is higher than the criteria which will affect the analysis of the modelling results, particularly when the maximum predicted concentrations, with background, are presented.

Table 2-4: Statistics of 24-hour PM_{10} PHIC CAM background file

Statistic	Concentration ($\mu\text{g}/\text{m}^3$)
Maximum	183
99th Percentile	53
95th Percentile	36
90th Percentile	32
70th Percentile	25
Average	22
Count >50 $\mu\text{g}/\text{m}^3$	5
Count >70 $\mu\text{g}/\text{m}^3$	1

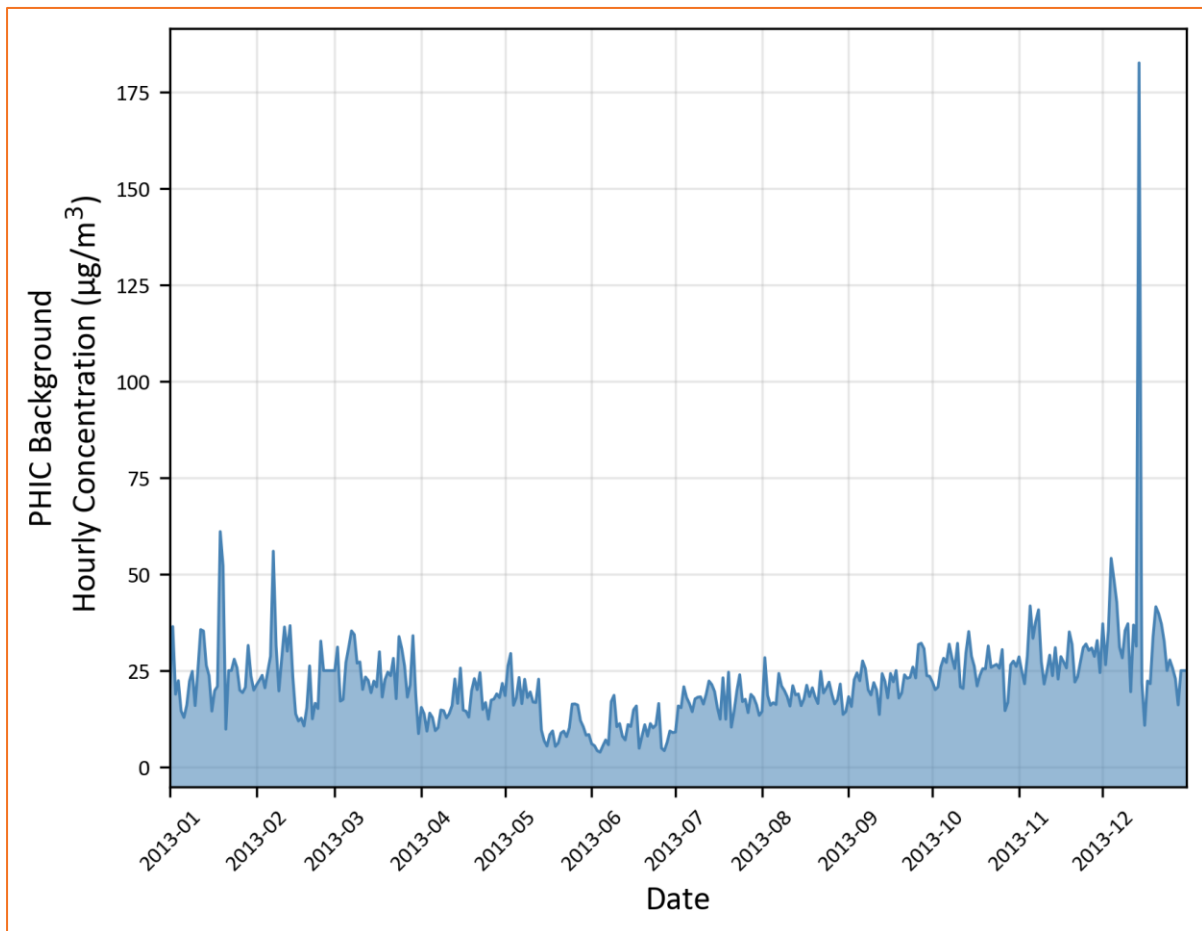


Figure 2-2: PHIC CAM background PM₁₀ 24-hour concentrations (µg/m³).

As outlined in PEL (2015) the background file developed for the PHIC CAM was only for PM₁₀ and the model has only been validated for this particle size. To assist in determining a potential PM_{2.5} background file the PM₁₀ to PM_{2.5} ratio was calculated for the monitoring data from the Bureau of Meteorology (BoM) from the PHIC annual monitoring reports¹ for the periods 2016/2017 through to 2019/2020. This data is presented in Table 2-5 where it is apparent that there is some inter-annual variation in the ratio of PM₁₀:PM_{2.5} an overall average ratio of 0.28 would be applicable.

To obtain an indicative assessment of PM_{2.5} in this assessment the PM₁₀ model results, for both the existing and approved operations and the Project, were scaled using a factor of 0.28.

¹ <https://www.phic-hedland.com.au/news-and-resources/reports/>

Table 2-5: Determining background PM_{2.5} from PM₁₀ concentrations.

Reporting year	PM ₁₀ concentrations		PM _{2.5} concentration		Ratio	
	Maximum	Annual average	Maximum	Annual average	Maximum	Annual average
2016/2017	80.3	21.4	24.2	6.3	0.30	0.29
2017/2018	54.5	23.8	20.2	6.9	0.37	0.29
2018/2019	107.1	31.5	22.2	8.9	0.21	0.28
2019/2020	293.2	32.1	55.3	7.9	0.19	0.25
				Average	0.27	0.28

2.7 Model uncertainty

Atmospheric dispersion models represent a simplification of the many complex processes involved in approximating ground-level concentrations of substances. The model uncertainties are associated with model chemistry and physics, data, and stochastic uncertainties. There are also inherent uncertainties in the behaviour of the random turbulence of the atmosphere.

Factors contributing to the general uncertainty in model results include:

- the turbulent (random) nature of dispersion in the turbulent atmosphere.
- inaccuracies in the mathematical description of the physical and chemical processes that occur in the atmosphere (i.e. uncertainties in the numerical solutions).
- stochastic uncertainties, as models predict 'ensemble mean' concentrations (i.e. they predict the mean concentrations that would result from a large set of observations under the specific conditions being modelled).
- data uncertainty or variability, particularly in emission information and meteorological data inputs.

Regarding emissions information in particular, as predicted concentrations are proportional to emission rates, any errors in the emission rates will cause a proportional error in the model's predictions.

The uncertainty in modelling of extreme events, such as the maximum 1-hour ground-level concentration, is greater than the uncertainty in predicting concentrations averaged over a longer time period. Similarly, uncertainty in modelling the maximum predicted ground-level concentration at a discrete location is greater than the uncertainty in the maximum concentration predicted across the entire modelled domain. This is because the modelled concentration at a particular location is very sensitive to small changes in wind direction.

To ensure that potential air quality impacts are not underestimated, conservative assumptions have been applied as appropriate, to address key areas of uncertainty to provide over-predictions rather than under-predictions of ground-level concentrations.

3 Emissions to air estimation

When determining the potential impact of a facility, either existing or proposed, one of the critical inputs is the source emission file. The following sections outline the process whereby potential sources are identified, and quantified, based on the forecast throughput tonnage of the facility.

3.1 Emission Sources

The location of the fugitive dust emitting sources at the Project are displayed in Figure 3-1. The coordinates for each of the modelled sources, along with the model parameters, is presented in Appendix B. Important points considered for emissions sources were:

- Emissions sources are focussed on:
 - Material transfers such as:
 - Unloading of magnetite ore
 - Transferring of ore, pellets, and briquettes
 - Stacking and reclaiming from stockpiles
 - Wind erosion from uncovered open areas.
- Sheds are planned for the ore, limestone and bentonite stockpiles which will suppress any wind erosion emissions and mitigate emissions from material transfer activities
- No shed is planned to cover the HBI stockpile

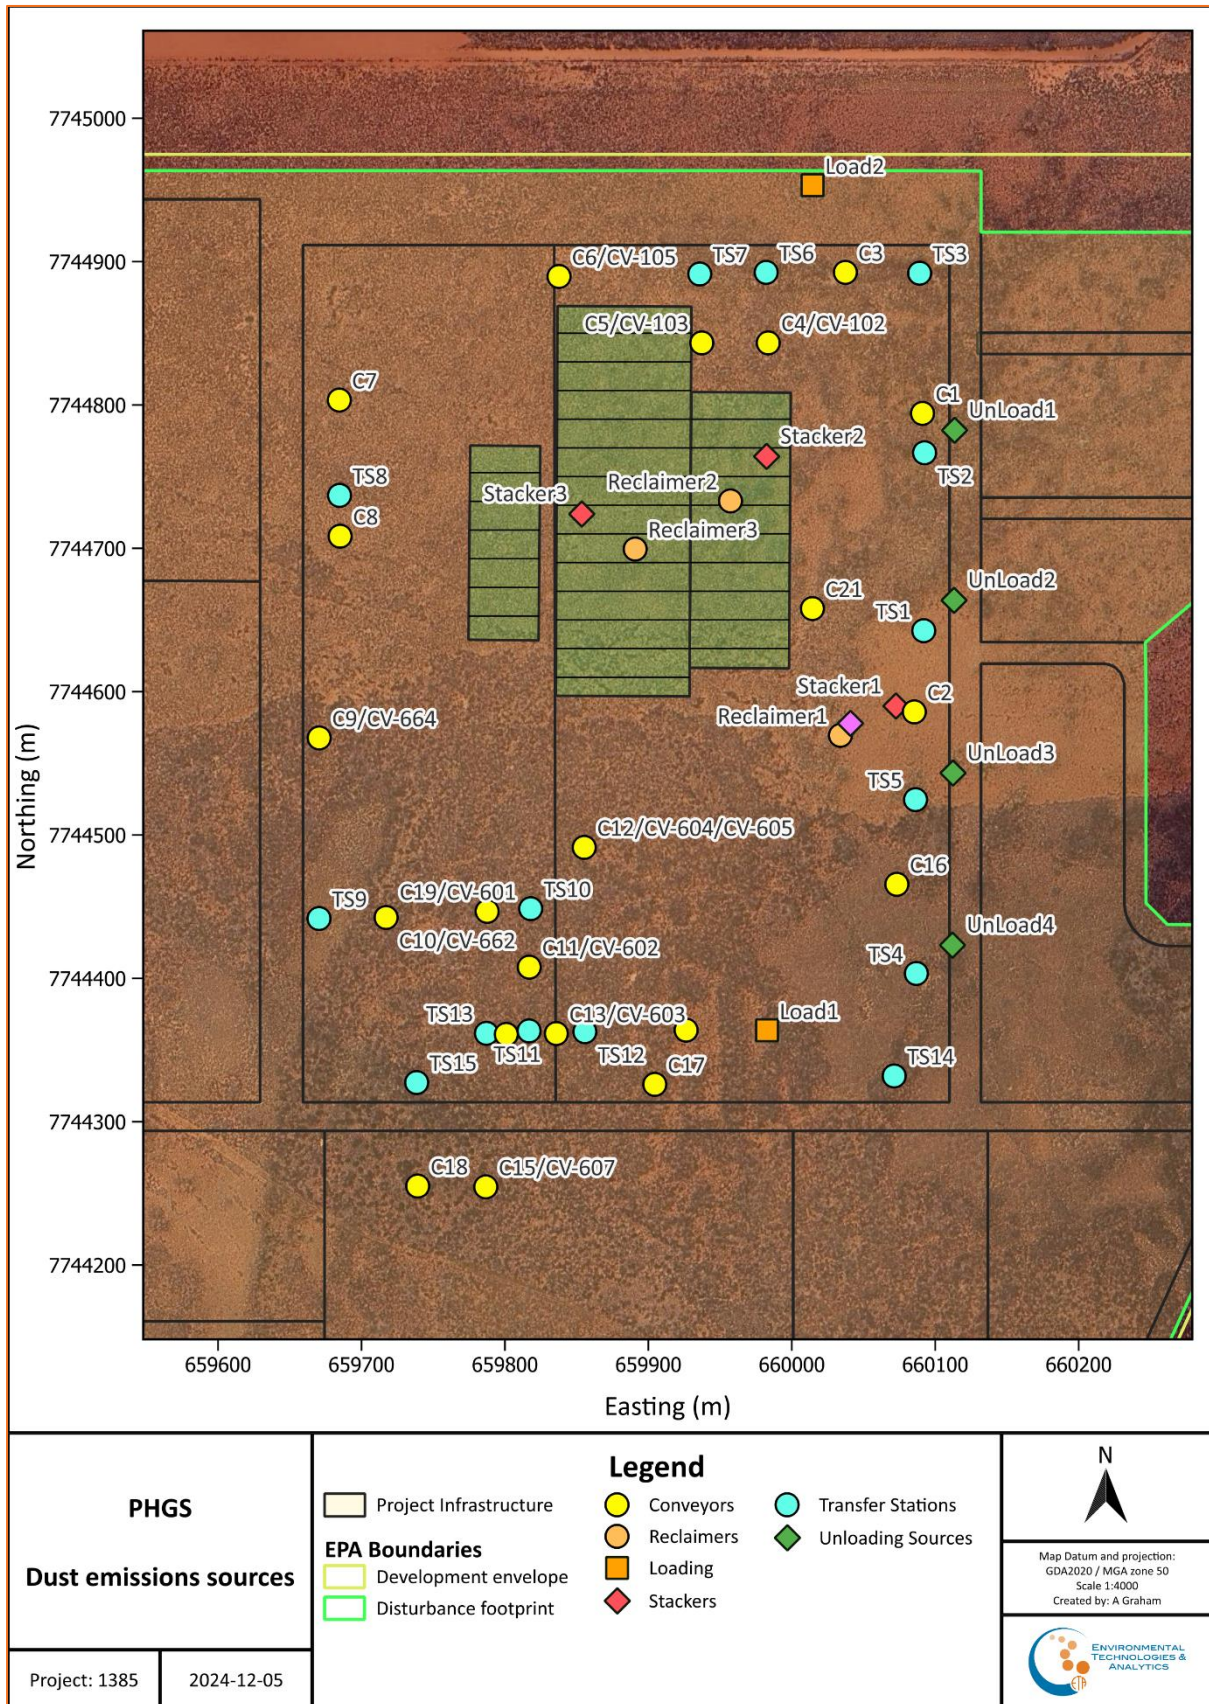


Figure 3-1: Location of dust emissions sources at the Project.

3.2 Emission estimates

This section outlines the emission estimation process for the Project. Emission estimates are sourced from this inventory for inclusion in the dispersion model. It includes the emissions from mine operations, facilities and associated infrastructure including the road network. Emissions from all key sources have been identified according to accepted methods. The emphasis of the emission estimation and modelling is on the potential impact from the operating phase of the various operations within the Project. Emission estimation of construction activities is excluded from the assessment due to their intermittent nature over the life of the Project.

3.2.1 Unloading ore

Emissions for unloading ore from trucks into the operations have been calculated using the default values of:

- PM_{10} : 0.0043 kg/t

The statistics of the annual emissions for loading for PM_{10} are contained in Appendix C.

3.2.2 Handling and transferring

The emissions for the handling and transferring, including stacking and reclaiming, were determined using the default emission factors for high moisture content ores from Table 3 of the Emission Estimation Technique Manual (EETM) for Mining (EA, 2012).

The statistics of the annual emissions for handling and transferring for PM_{10} are contained in Appendix C.

3.2.3 Loading ore

Emissions for loading ore have been calculated using the default value for excavators and front end loaders on overburden of:

- PM_{10} : 0.012 kg/t

The statistics of the annual emissions for loading for PM_{10} are contained in Appendix C.

3.2.4 Wind erosion

The default emission factor for wind erosion in the EETM for Mining (EA, 2012) is a constant emission of 0.2 kg/ha/hr which, while potentially suitable for the calculation of annual emissions, is not suitable for inclusion in atmospheric modelling. This assessment used the modified Shao equation outlined in SKM (2005) which is represented as Equation 3:

$$\text{Equation 1: } PM_{10(g/m^2/s)} = k \times \{WS^3 \times (1 - (WS_0^2/WS^2))\} \quad WS > WS_0$$

$$PM_{10(g/m^2/s)} = 0 \quad WS < WS_0$$

Where: WS = wind speed (m/s)
 WS_0 = threshold for particulate matter lift off (m/s)
 K is a constant

3.3 Emission Controls

Emissions controls (for dust abatement) were included in the emissions estimation and these controls are summarised in Table 3-1, along with the percentage reduction applied to each source type. Of note is that:

- The proposed sheds covering the limestone and bentonite stockpiles have a potential 100% reduction, while an extraction fan into a baghouse may be utilised to achieve 100% reduction this information was not finalised so a conservative 90% reduction was applied.
- Water suppression for the HBI product is not an option (due to the potential of spontaneous combustion). Thus loading and open areas sources have no abatement applied.
- Conveyors will be enclosed and thus had a 100% reduction and were not modelled.
- Transfer stations were reported to have a partial enclosure.

Table 3-1: Dust abatement in place (included in model)

Source	Equipment	Dust abatement description	Emission reduction
Material transfers	Loading Pellets/HBI	No reduction	
	Unloading Ore	Partial enclosure with water sprays	80%
	Transfer stations	Partial enclosure	50%
	Stacker HBI Yard	No reduction	
	Reclaimer HBI Yard	No reduction	
	Stackers	Enclosed	90%
	Reclaimers	Enclosed	90%
Open Areas	Wind erosion at HBI Yard	No reduction	

3.3.1 Emission summary

The emissions for the Project scenario is presented in Table 3-2. The majority of emissions come from the loading of product and transfer stations.

Table 3-2: Total estimated emissions for modelled scenarios

Scenario	Estimated Emissions (kg/yr)
Unloading Ore	11,410
Loading Pellets/HBI	129,500
Reclaimers	16,170
Stackers	16,170
Transfer stations	125,160
Open Areas	4,930
Total Emissions	291,930

3.4 Cumulative Scenario

The modelling of cumulative emissions is a requirement of DWER (DoE, 2006). The cumulative emission sources for this study include both the current and planned export operations in the Port Hedland region including:

- 330 Mtpa from the BHP operations at Nelson Point and Finucane Island.
- 28 Mtpa from the PPA operations at Utah Point.
- 210 Mtpa from the Fortescue operations.
- 50 Mtpa from the proposed NWI operations.
- 70 Mtpa from the Roy Hill facility.

Emissions for existing and planned operations with the Port Hedland airshed were obtained from PHIC and the full emission estimation process is outlined in the PEL (2015) report.

4 Predicted air quality impact

As outlined in Section 2.1 this assessment utilised the PHIC CAM to determine the potential impact associated with the proposed increase in handled tonnage through the Company Port operations. The modelling focus is on particulates, primarily as PM₁₀, and this section outlines the results.

For this assessment, a single scenario of 3.5Mtpa ore in-take at the Project were modelled. This was then compared to the existing PHIC network scenario. The specific scenarios considered were:

- Scenario 1: Base Case – Existing and approved PHIC Operations (as per Section 3.4) with background.
- Scenario 2: The Project standalone without background.
- Scenario 3: Cumulative operations (the Project, BHP, Fortescue, PPA , Roy Hill, and NWI) with background.

4.1 Scenario 1: Base Case

4.1.1 PM₁₀

The predicted ground level concentrations at three receptors; Taplin St, Wedgefield, and South Hedland for Scenario 1 (existing and approved PHIC operations) are presented in Table 4-1. The predicted results at all receptors in the region are contained in Appendix D.

Table 4-1: Predicted 24-hour average ground level concentrations of PM₁₀ at Receptors for Scenario 1 with background (µg/m³)

Statistic	Taplin St.	Neptune Pl.	South Hedland
Maximum	200	193	187
99th percentile	74	99	61
95th percentile	57	72	46
90th percentile	51	63	39
75th percentile	43	48	30
Average	34.3	37.5	25.5
Count >70 µg/m ³	7	22	1

The isopleths for the cumulative predicted maximum PM₁₀ 24-hour concentrations for Scenario 1 are presented in Figure 4-1 and the annual average concentrations are presented in Figure 4-2. Noting that:

- Most maximum predicted daily average PM₁₀ values occurred on the same date, 14th of December 2013, where the background concentration was 182 µg/m³.
 - As a result, the features in the contour plot largely reflect the modelled dust characteristics on a single date.

- The contour plot indicates that industry emissions are concentrated over the western side of the harbour with significant emissions over Port Hedland. Noting that maximum daily average emissions may look different without background.

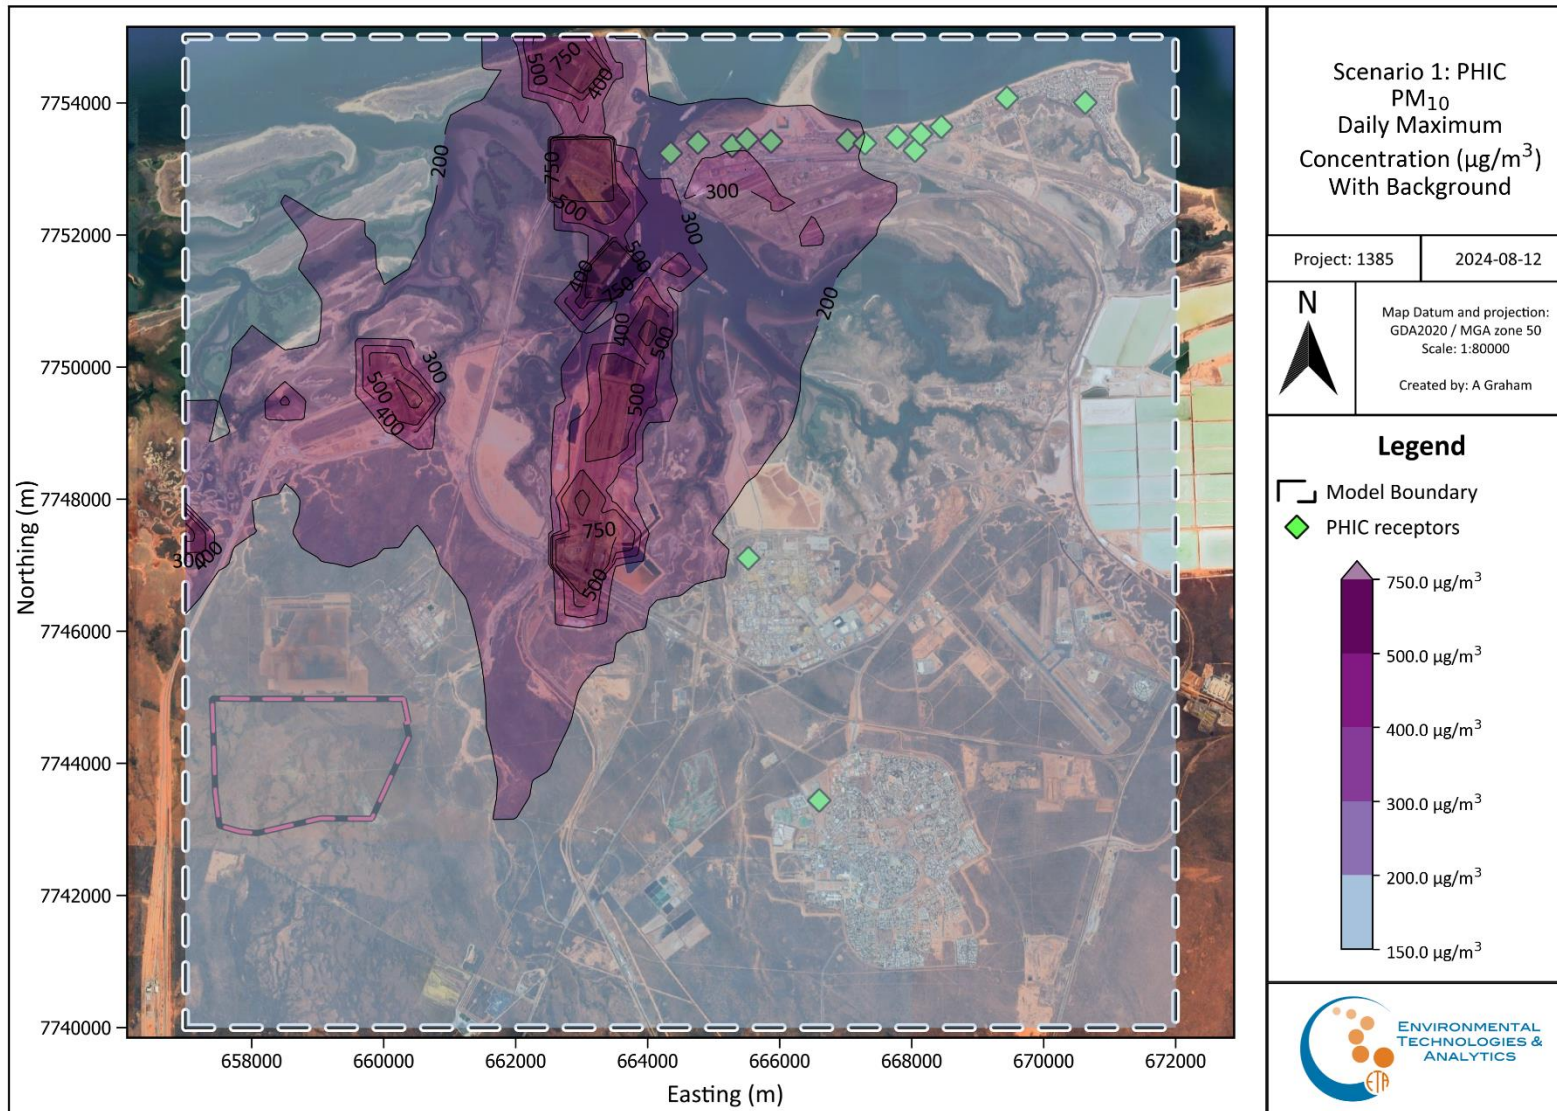


Figure 4-1: Maximum 24-hour PM₁₀ concentrations for PHIC existing and cumulative model

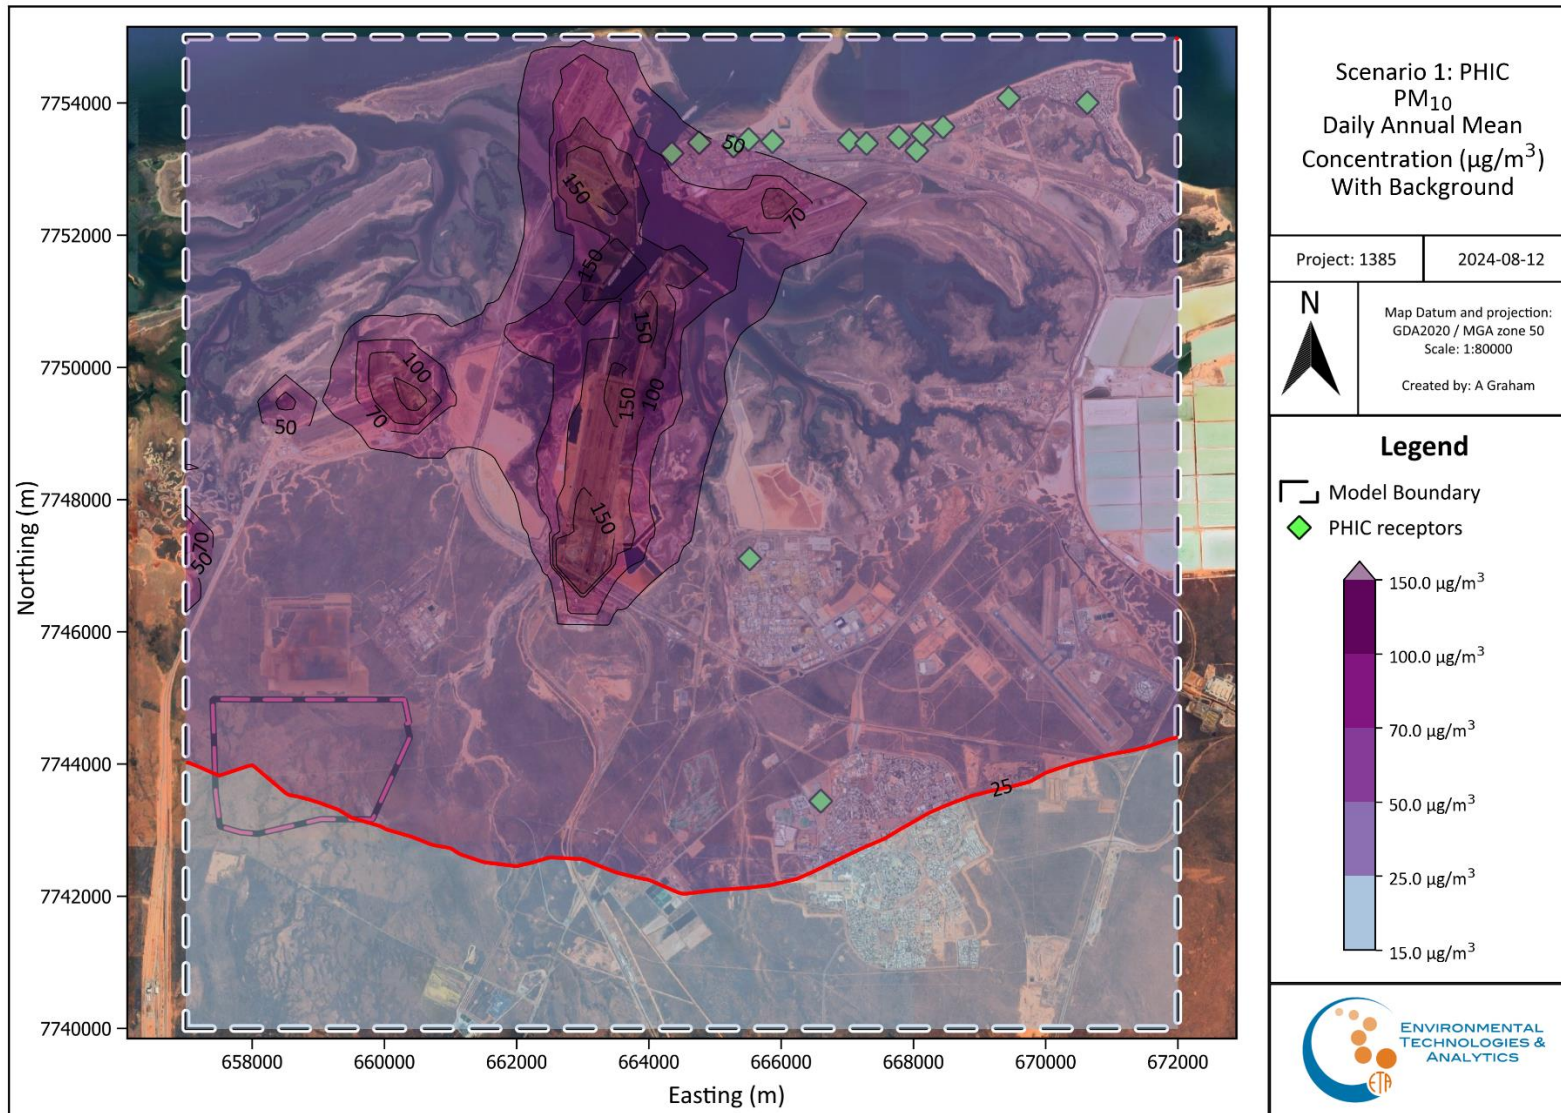


Figure 4-2: Annual average PM₁₀ concentrations for PHIC existing and cumulative model

4.1.2 PM_{2.5}

The predicted ground level concentrations for PM_{2.5} at three receptors; Taplin St, Wedgefield, and South Hedland for Scenario 1 (existing and approved PHIC operations) are presented in Table 4-2. Note that as discussed in Section 2.6 these results were determined by scaling down the PM₁₀ concentrations and should only be considered as indicative.

The predicted results at all receptors in the region are contained in Appendix E.

Table 4-2: Predicted 24-hour average ground level concentrations of PM_{2.5} at Receptors for Scenario 1 with background (µg/m³)

Statistic	Taplin St.	Neptune Pl.	South Hedland
Maximum	56	54	52
99th percentile	21	17	17
95th percentile	16	12	13
90th percentile	14	11	11
75th percentile	12	9	8
Average	9.6	7.6	7.1
Count >25 µg/m ³	1	1	1

The isopleths for the cumulative predicted maximum PM_{2.5} 24-hour concentrations for Scenario 1 are presented in Figure 4-3 and the cumulative predicted annual average PM_{2.5} concentrations are presented in Figure 4-4. Noting that:

- These results were determined by scaling down the PM₁₀ concentrations and should only be considered as indicative.
- As with the PM₁₀ concentrations these results are influenced by a single elevated background concentration which occurred on the 14th of December 2013. As a result, the features in the contour plot largely reflect the modelled dust characteristics on a single date.
- The contour plot indicates that industry emissions are concentrated over the western side of the harbour with significant emissions over Port Hedland. Noting that maximum daily average emissions may look different without background.

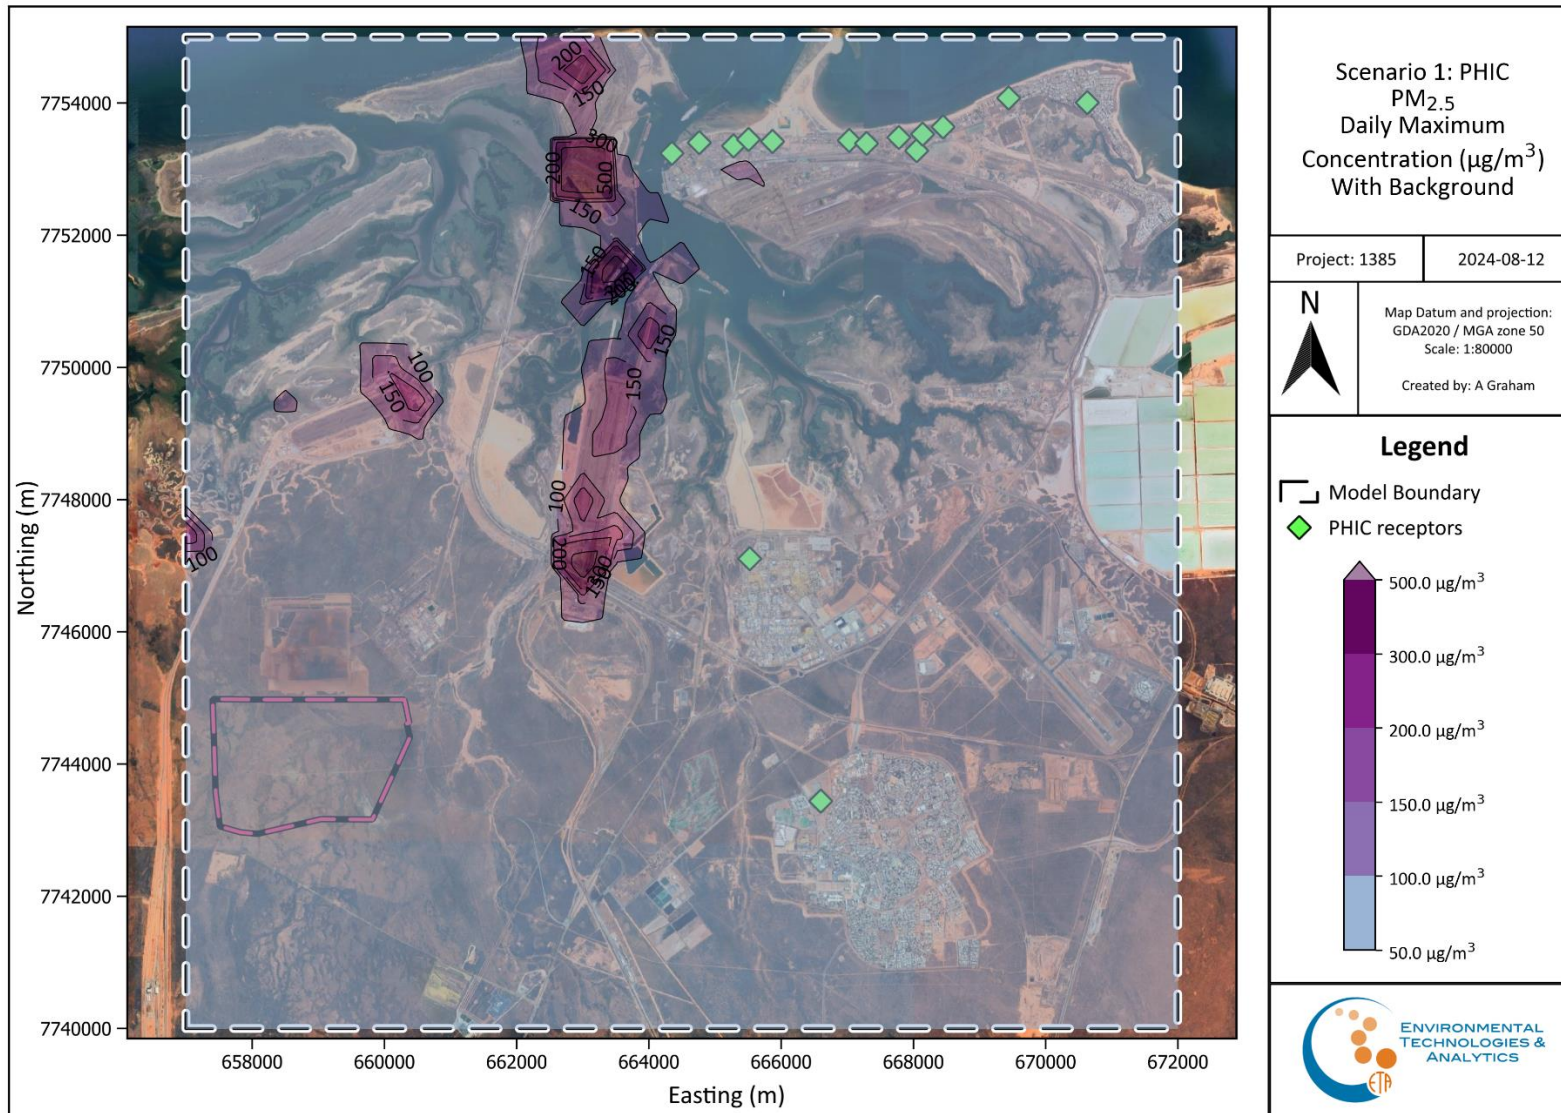


Figure 4-3: Indicative maximum 24-hour PM_{2.5} concentrations for PHIC existing and cumulative model

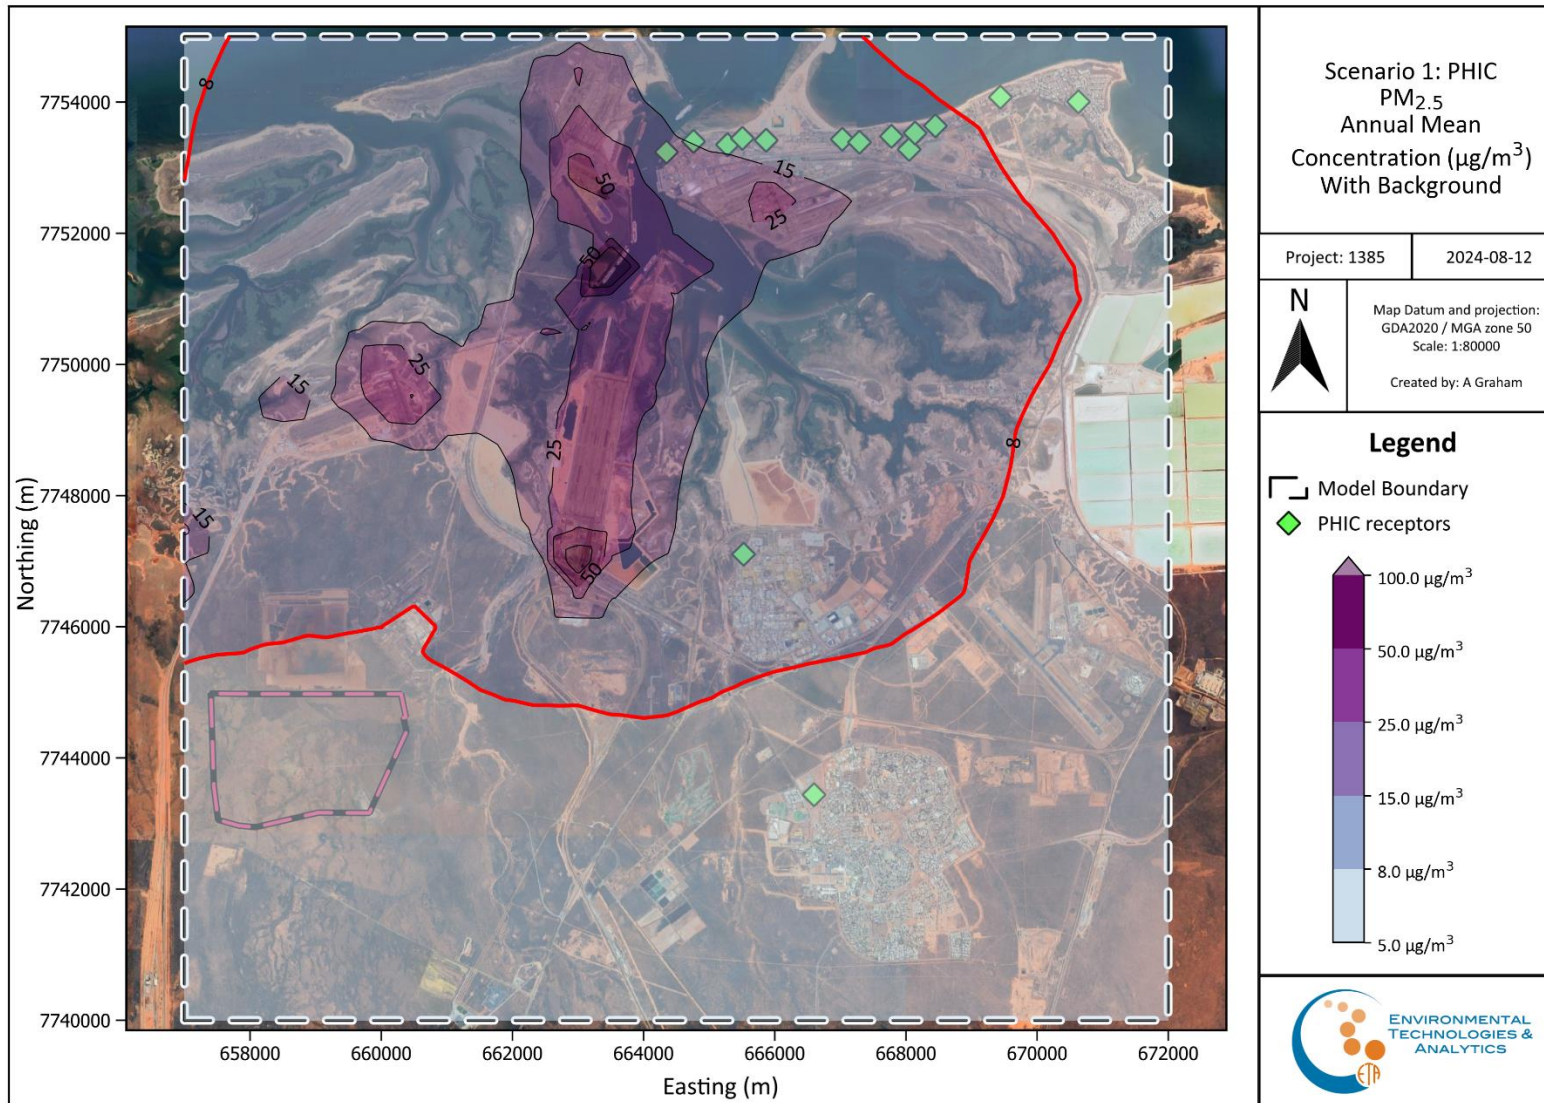


Figure 4-4: Indicative annual average PM_{2.5} concentrations for PHIC existing and cumulative model

4.2 Scenario 2: Port Hedland Green Steel only

4.2.1 PM₁₀

The predicted ground level concentrations at three receptors; Taplin St, Neptune Pl, and South Hedland for Scenario 2 (conceptual South West Creek) are presented in Table 4-3. The predicted results at all receptors in the region are contained in Appendix D. These results indicate that:

- At the Taplin St receptor all of the predicted 24-hour averaged PM₁₀ concentrations are below 1 µg/m³.
- The highest predicted impact will be 3.2 µg/m³ at the South Hedland receptor, with the lower percentile results being significantly lower.

Table 4-3: Predicted 24-hour ground level concentrations of PM₁₀ at Receptors for Scenario 2 (µg/m³)

Statistic	Taplin St.	Neptune Pl.	South Hedland
Maximum	0.8	1.9	3.2
99th percentile	0.5	1.4	2.3
95th percentile	0.3	1.0	1.6
90th percentile	0.2	0.7	1.1
75th percentile	0.1	0.4	0.4
Average	0.07	0.25	0.33
Count >70 µg/m ³	0	0	0

The isopleths for the cumulative predicted maximum PM₁₀ 24-hour concentrations for Scenario 2 are presented in Figure 4-5 with the annual average PM₁₀ concentrations presented in Figure 4-6.

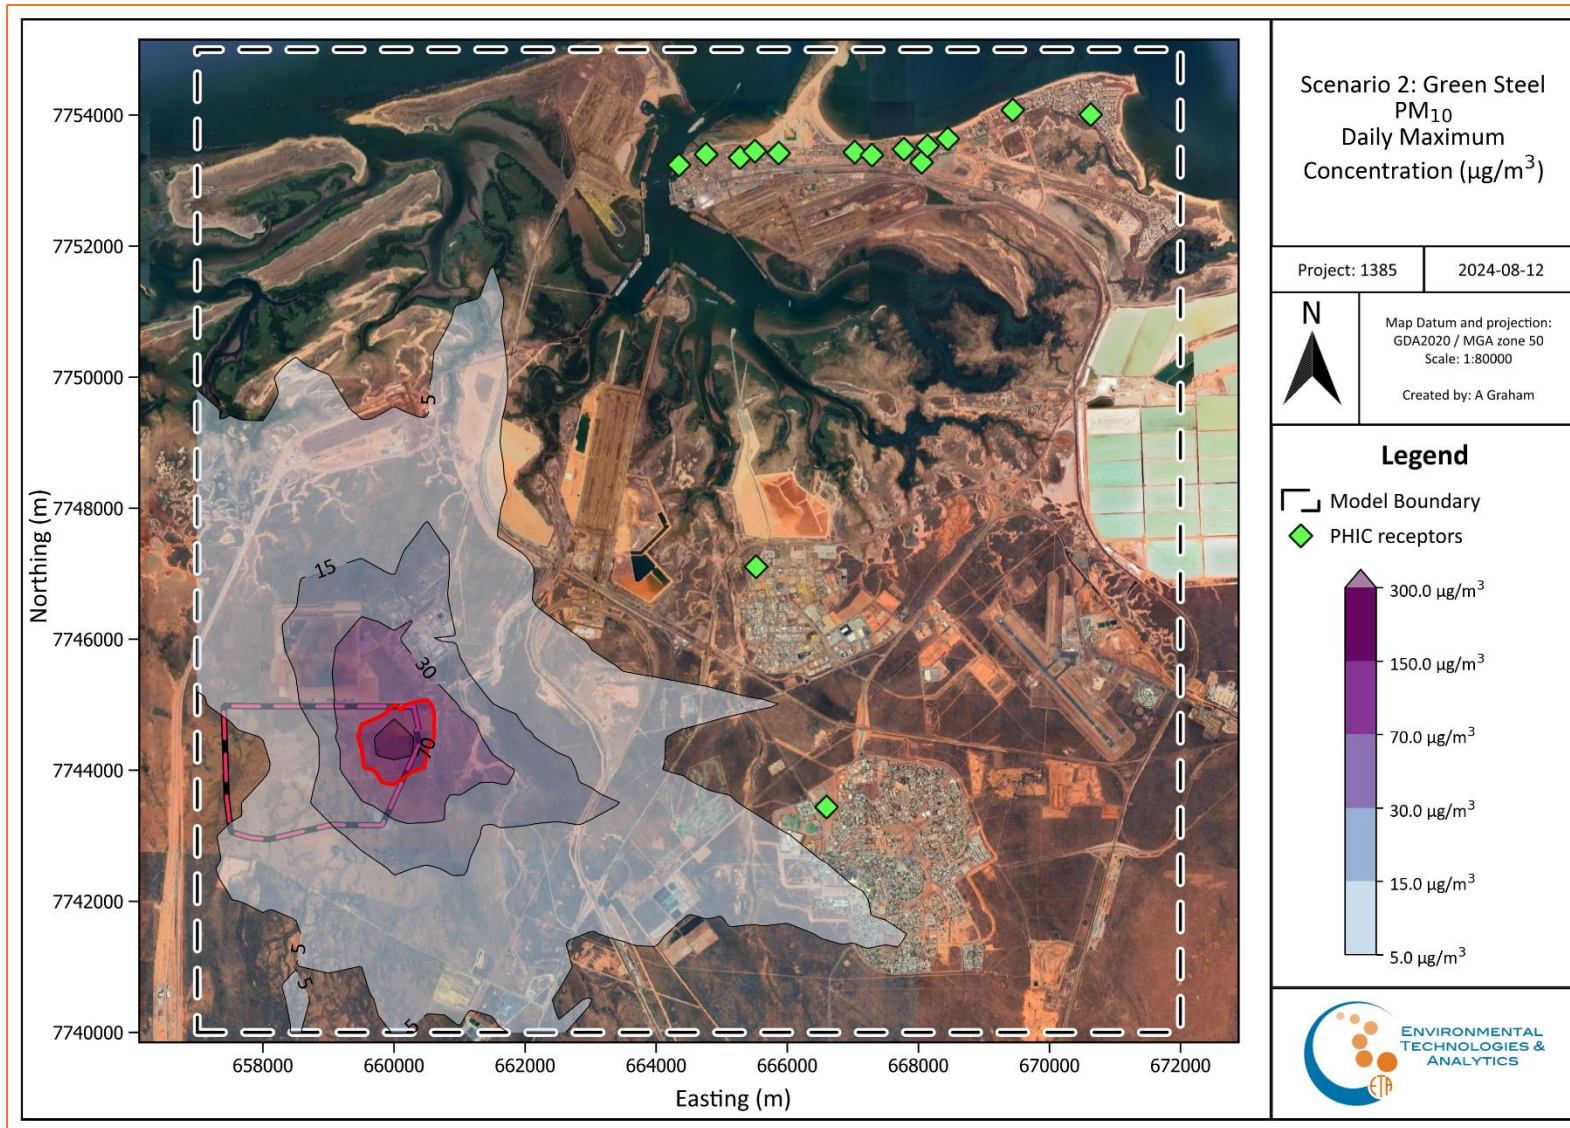


Figure 4-5: Maximum 24-hour PM₁₀ concentrations for Scenario 2: the Project (µg/m³)

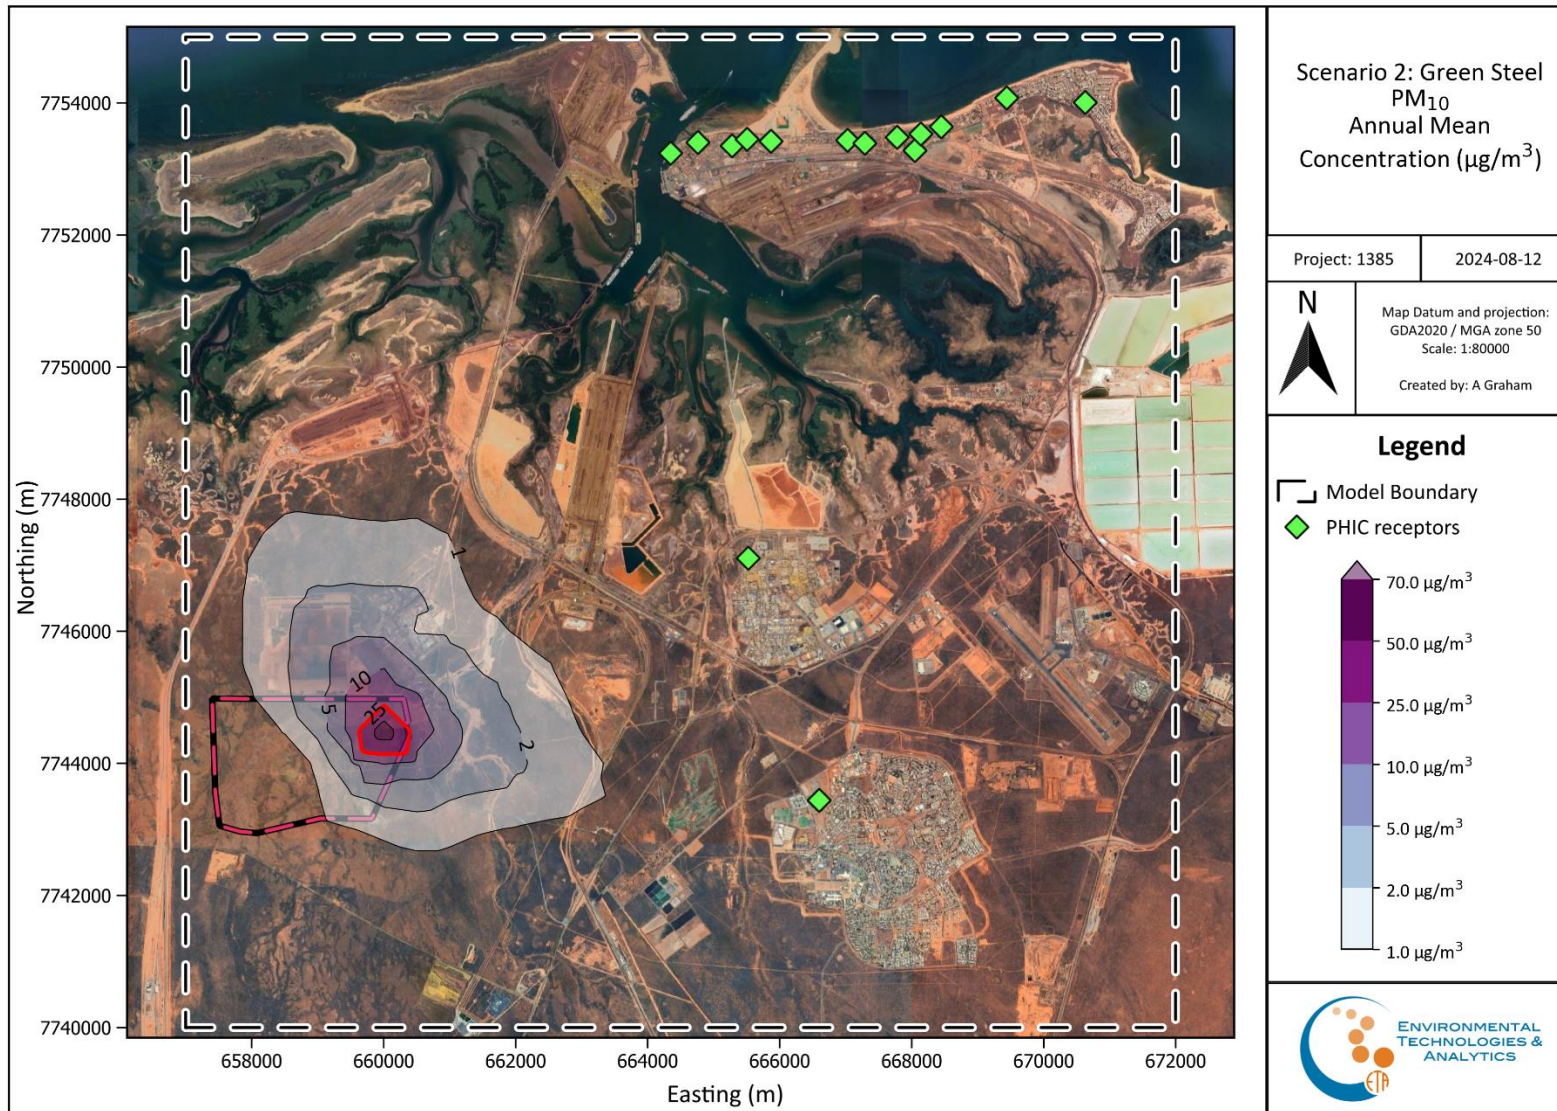


Figure 4-6: Annual average PM₁₀ concentrations for Scenario 2: the Project ($\mu\text{g}/\text{m}^3$)

4.2.2 PM_{2.5}

The predicted ground level concentrations at three receptors; Taplin St, Wedgefield, and South Hedland for Scenario 2 (the Project) are presented in Table 4-4. These results indicate that:

- At the Taplin St receptor all of the predicted 24-hour averaged PM_{2.5} concentrations are well below 1 µg/m³.
- The highest predicted impact will be 0.9 µg/m³ at the South Hedland receptor, with the lower percentile results being significantly lower.


The predicted results at all receptors in the region are contained in Appendix E.

Table 4-4: Predicted 24-hour average ground level concentrations of PM_{2.5} at Receptors for Scenario 2 without background (µg/m³)

Statistic	Taplin St.	Neptune Pl.	South Hedland
Maximum	0.23	0.19	0.90
99th percentile	0.14	0.11	0.63
95th percentile	0.08	0.06	0.44
90th percentile	0.06	0.05	0.31
75th percentile	0.02	0.02	0.11
Average	0.02	0.01	0.09
Count >25 µg/m ³	0	0	0

The isopleths for the cumulative predicted maximum PM_{2.5} 24-hour concentrations for Scenario 2 are presented in Figure 4-7 and the cumulative predicted annual average PM_{2.5} concentrations are presented in Figure 4-8. Noting that:

- These results were determined by scaling down the PM₁₀ concentrations and should only be considered as indicative.

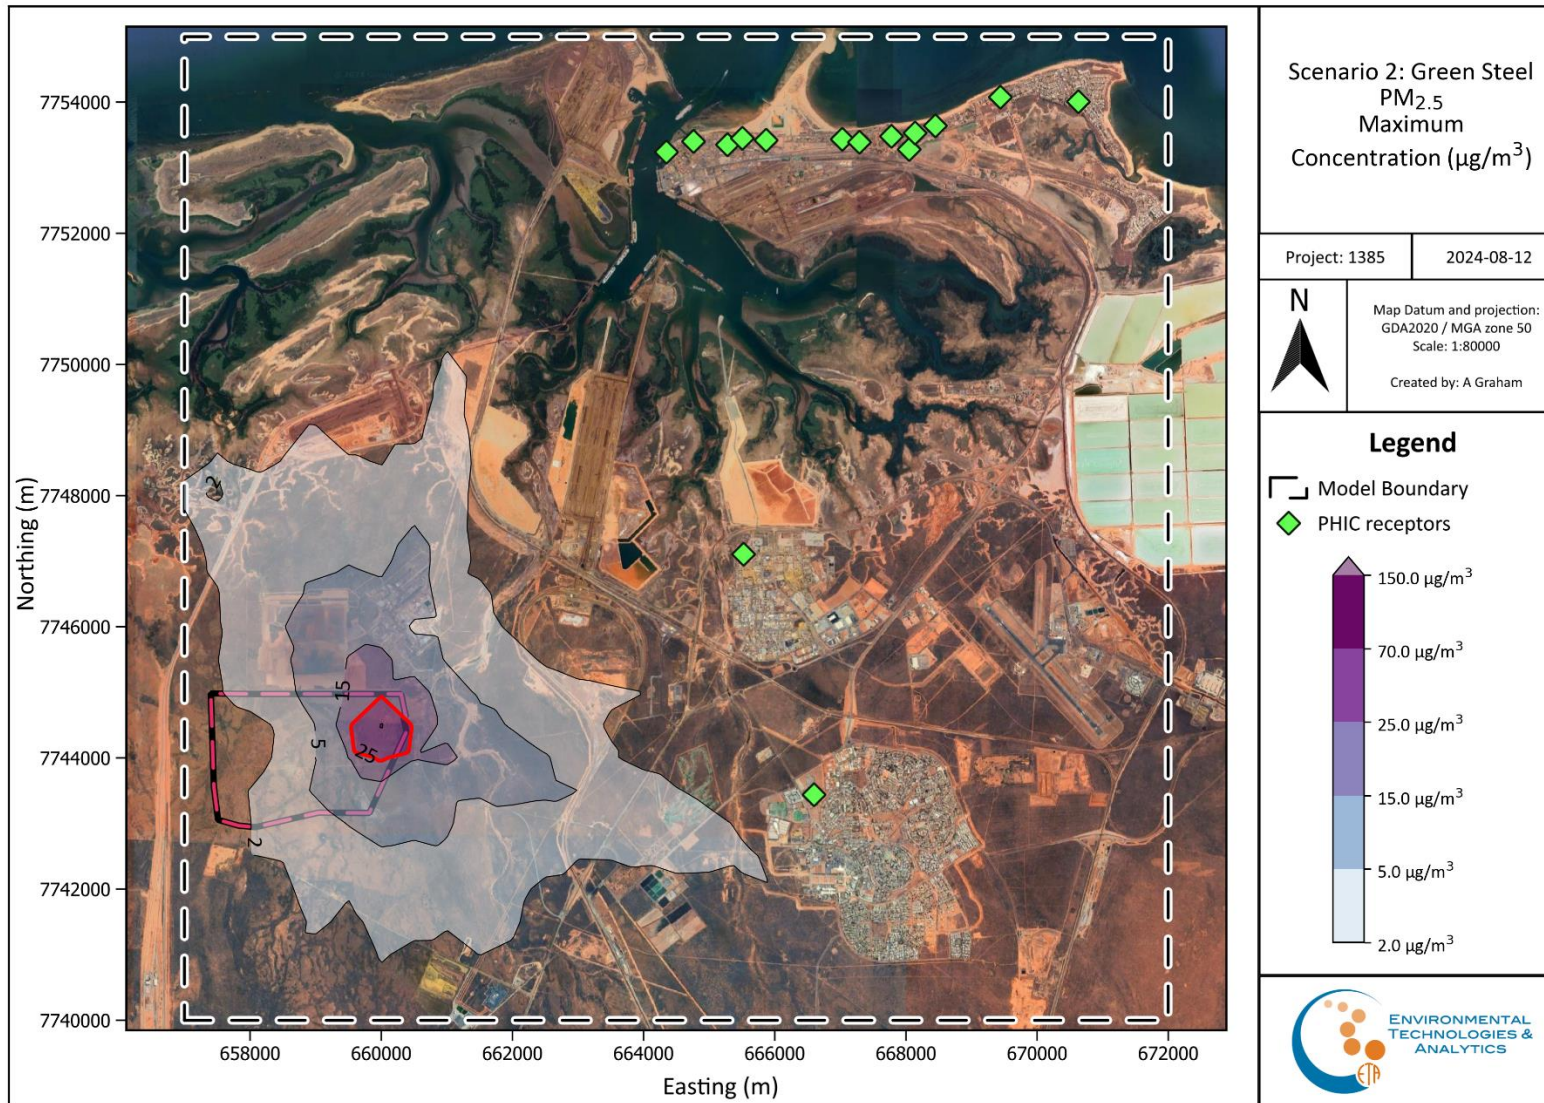

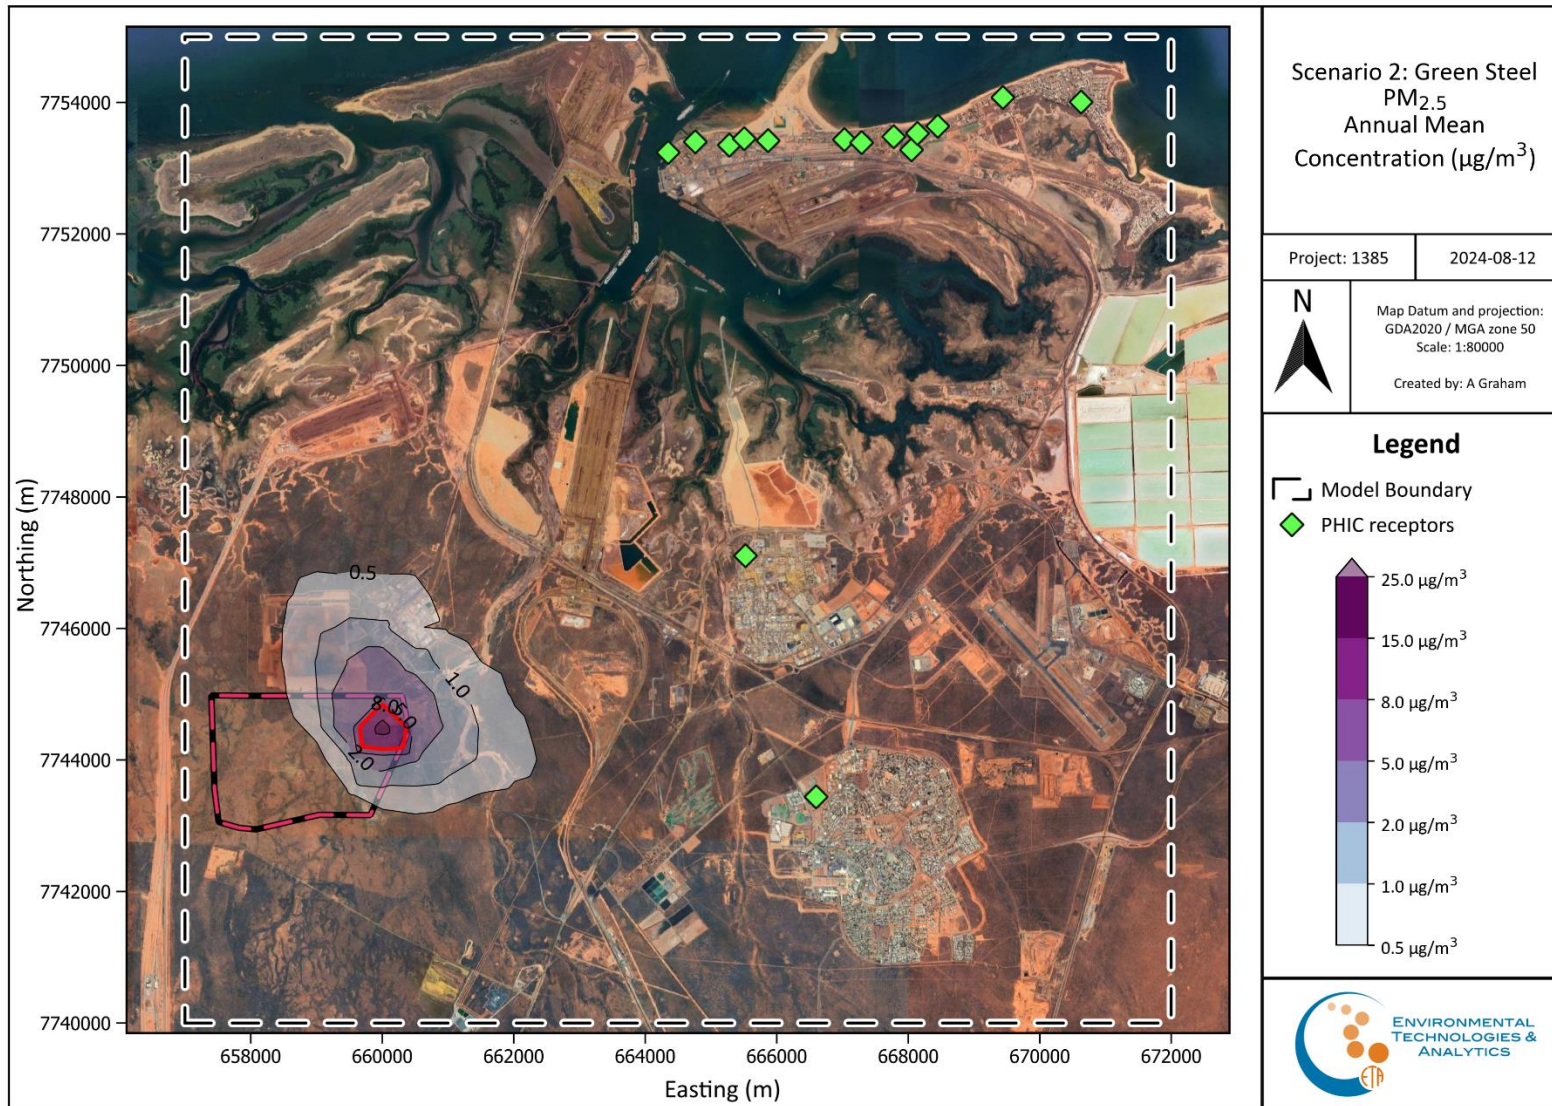


Figure 4-8: Indicative annual average PM_{2.5} concentrations for Scenario 2: the Project (µg/m³)

4.3 Scenario 3: Cumulative Operations

The final scenario presented (Scenario 3) combines the existing and approved facilities with background (Scenario 1) and the modelled Project impact (Scenario 2) to evaluate the cumulative effect of the Project in the broader context of Port Hedland.

4.3.1 PM₁₀

The predicted ground level concentrations at three receptors; Taplin St, Wedgefield, and South Hedland for this scenario are presented in Table 4-5. Of note is that:

- There is no predicted change to the number of excursion of the criteria at the Taplin St receptor
- There is no predicted change to the maximum predicted 24-hour PM₁₀ concentration at the Taplin St receptor.
- There are no predicted changes to the maximum predicted 24-hour PM₁₀ concentration at either the Wedgefield or South Hedland receptors.

The predicted results at all receptors in the region are contained in Appendix D.

Table 4-5: Predicted 24-hour ground level concentrations of PM₁₀ at Receptors for Scenario 3 (µg/m³) with background

Statistic	Taplin St.	Neptune Pl.	South Hedland
Maximum	200	194	187
99th percentile	74	99	62
95th percentile	57	72	47
90th percentile	51	63	39
75th percentile	43	49	30
Average	34.4	37.8	25.8
Count >70 µg/m ³	7	23	1

The isopleths for the cumulative predicted maximum PM₁₀ 24-hour concentrations for Scenario 3 are presented in Figure 4-9 while those for the predicted annual average PM₁₀ concentrations are presented in Figure 4-10.

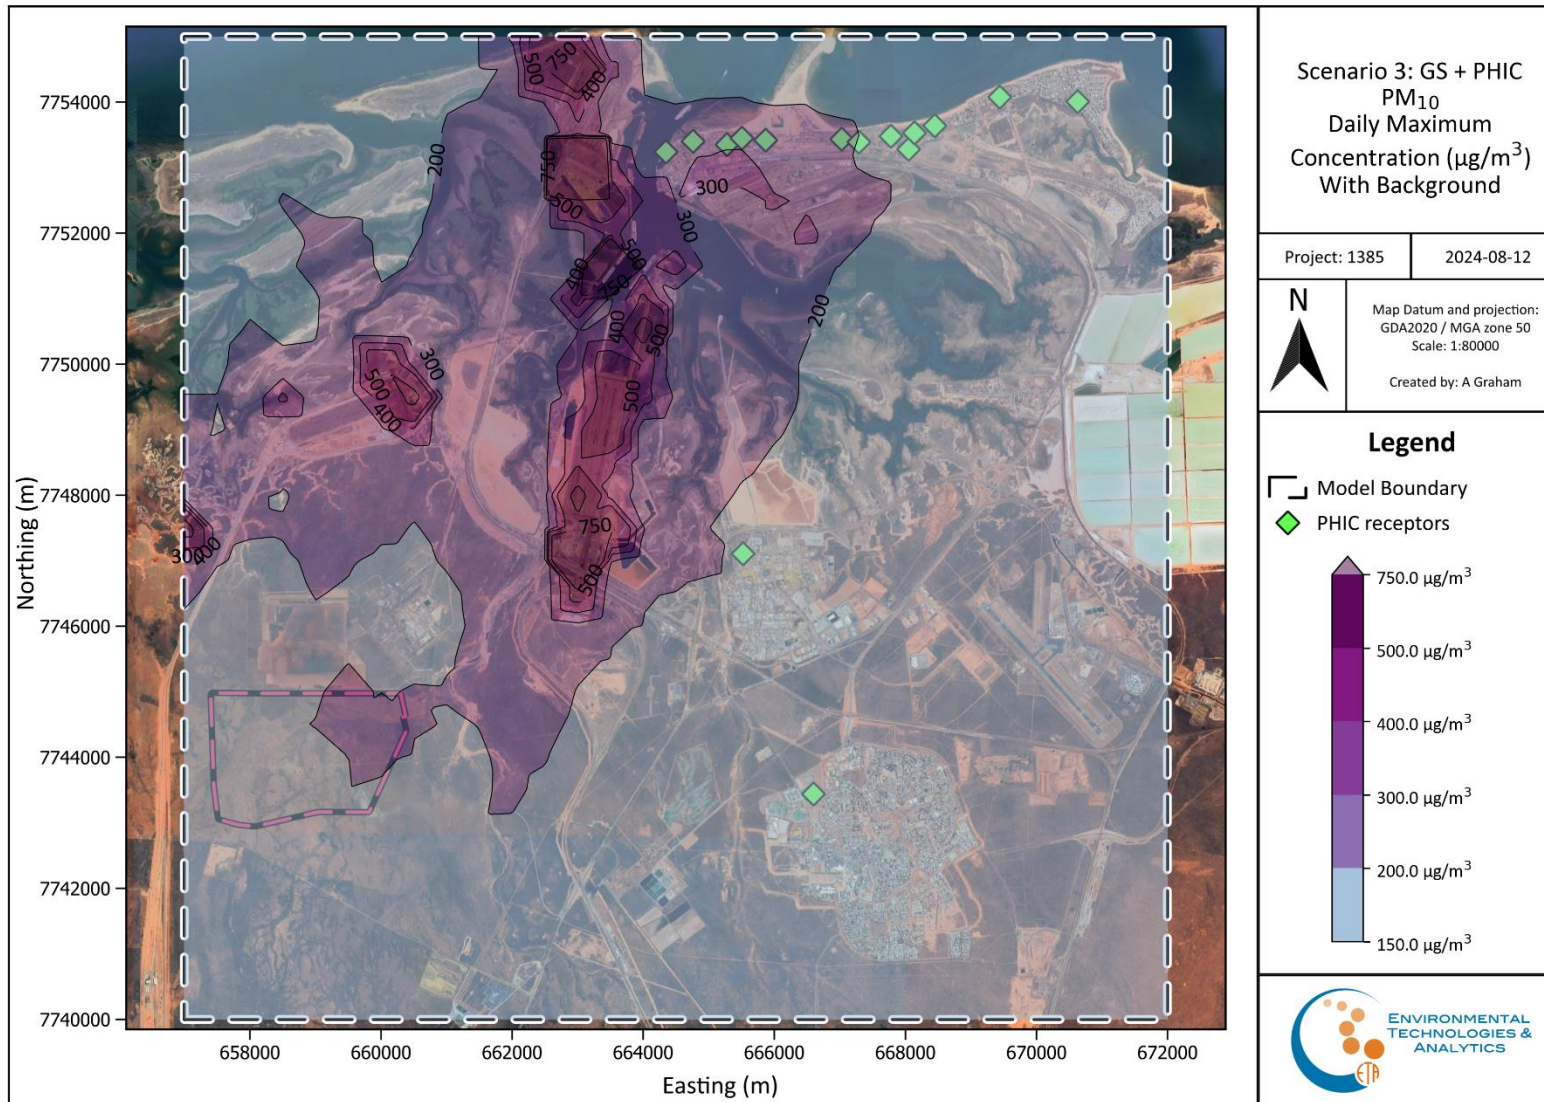


Figure 4-9: Maximum 24-hour PM₁₀ concentrations for Scenario 3: PHGS + PHIC (µg/m³)

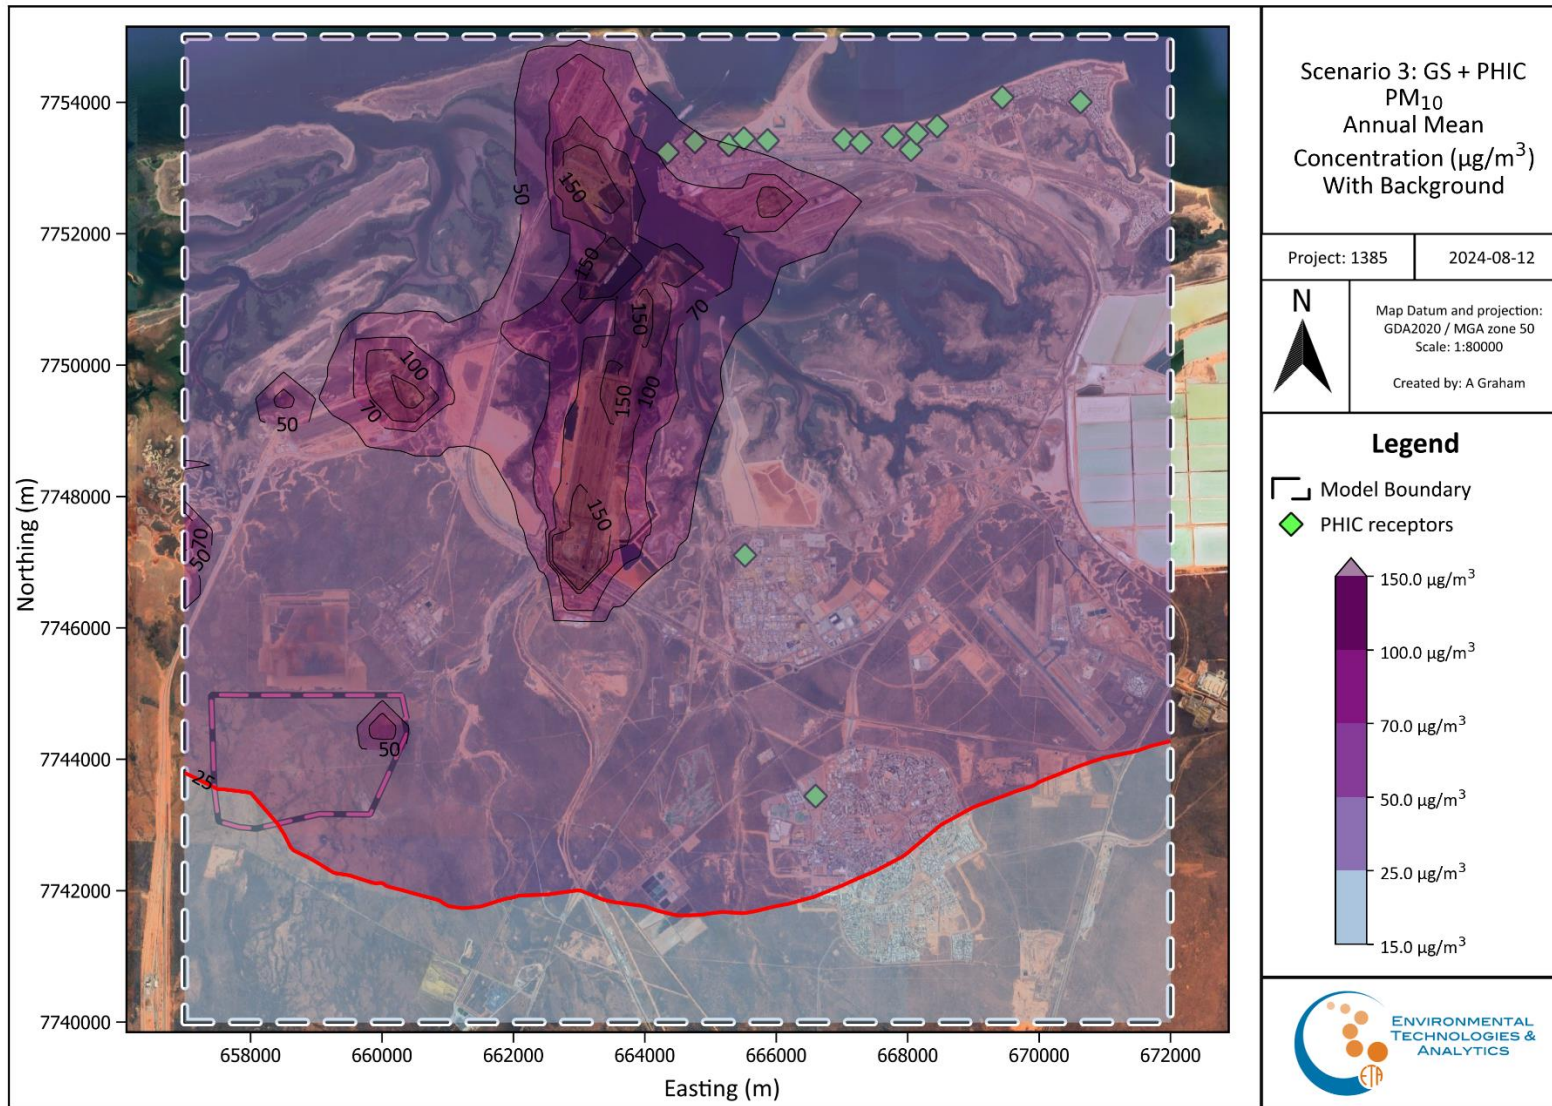


Figure 4-10: Annual average PM₁₀ concentrations for Scenario 3: PHGS + PHIC (µg/m³)

4.3.2 PM_{2.5}

The predicted ground level concentrations for PM_{2.5} at three receptors; Taplin St, Wedgefield, and South Hedland for Scenario 3 (existing and approved PHIC operations plus the Project) are presented in Table 4-6. Of note is that:

- There is no predicted change to the number of excursion of the criteria at the Taplin St receptor
- There is no predicted change to the maximum predicted 24-hour PM_{2.5} concentration at the Taplin St receptor.
- There are no predicted changes to the maximum predicted 24-hour PM_{2.5} concentration at either the Wedgefield or South Hedland receptors.

The predicted results at all receptors in the region are contained in Appendix E.

Table 4-6: Predicted 24-hour average ground level concentrations of PM_{2.5} at Receptors for Scenario 3 with background (µg/m³)

Statistic	Taplin St.	Neptune Pl.	South Hedland
Maximum	56	54	52
99th percentile	21	17	17
95th percentile	16	12	13
90th percentile	14	11	11
75th percentile	12	10	8
Average	9.6	7.7	7.2
Count >25 µg/m ³	1	1	1

The isopleths for the cumulative predicted maximum PM_{2.5} 24-hour concentrations for Scenario 3 are presented in Figure 4-11 and the cumulative predicted annual average PM_{2.5} concentrations are presented in Figure 4-12. Noting that:

- These results were determined by scaling down the PM₁₀ concentrations and should only be considered as indicative.
- As with the PM₁₀ concentrations these results are influenced by a single elevated background concentration which occurred on the 14th of December 2013. As a result, the features in the contour plot largely reflect the modelled dust characteristics on a single date.

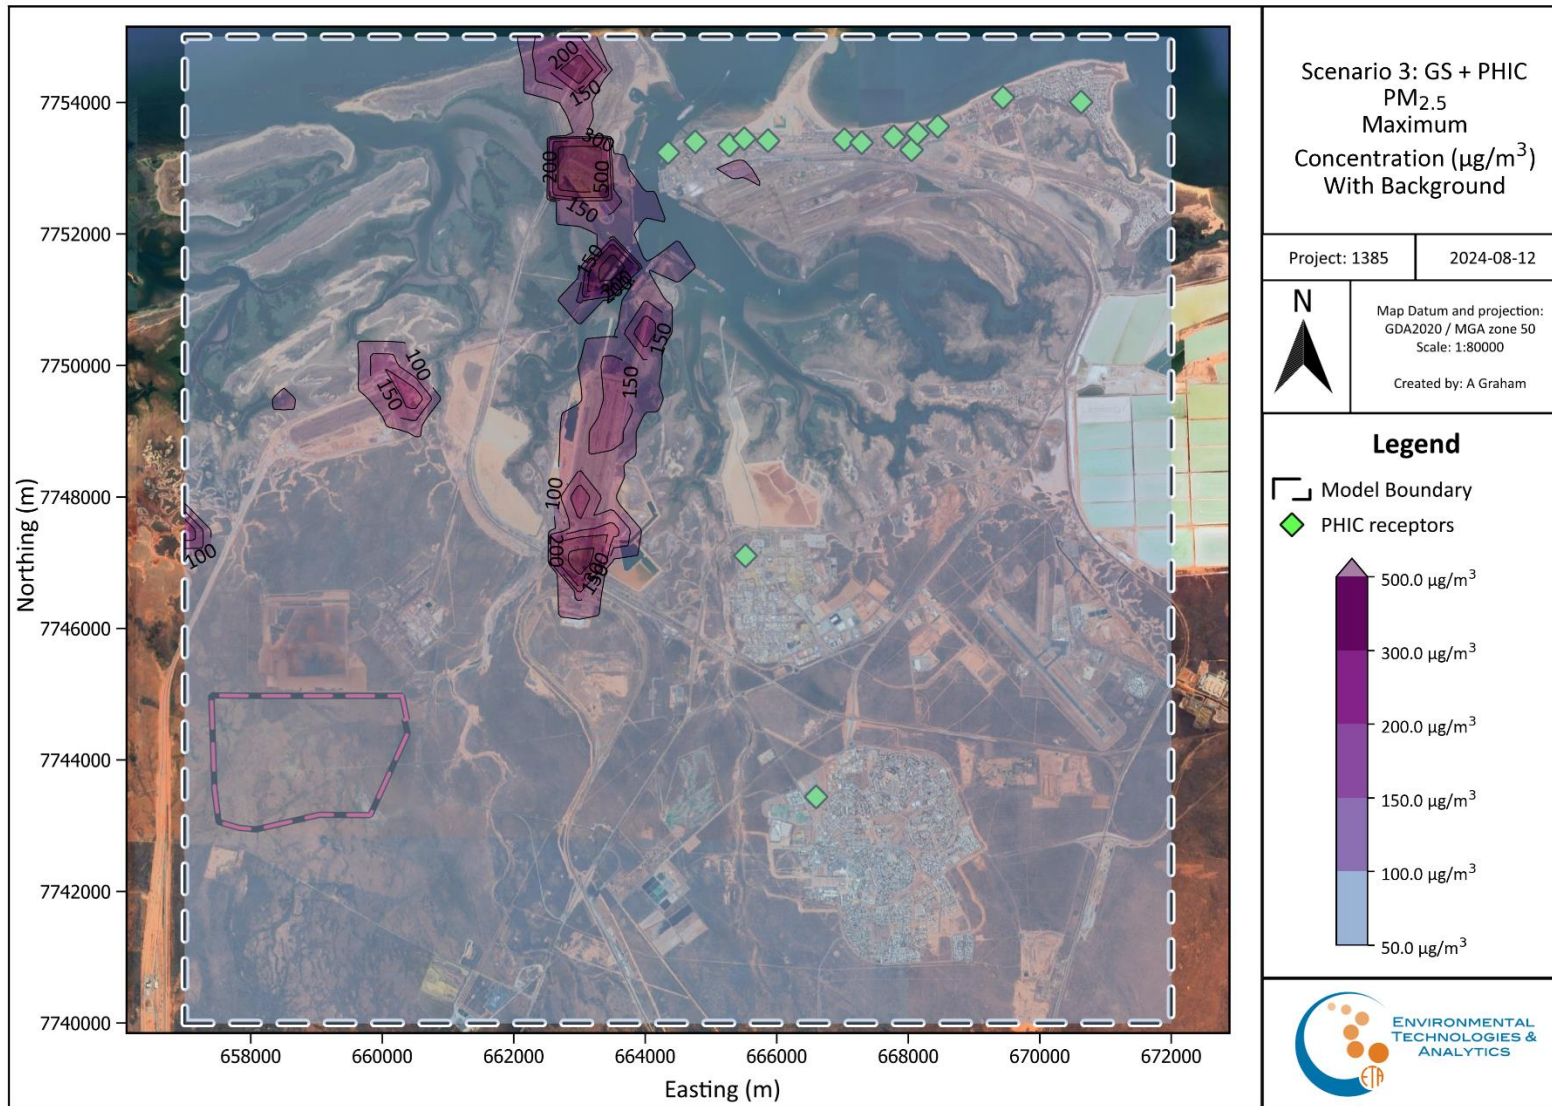


Figure 4-11: Indicative maximum 24-hour PM_{2.5} concentrations for PHIC existing and cumulative model

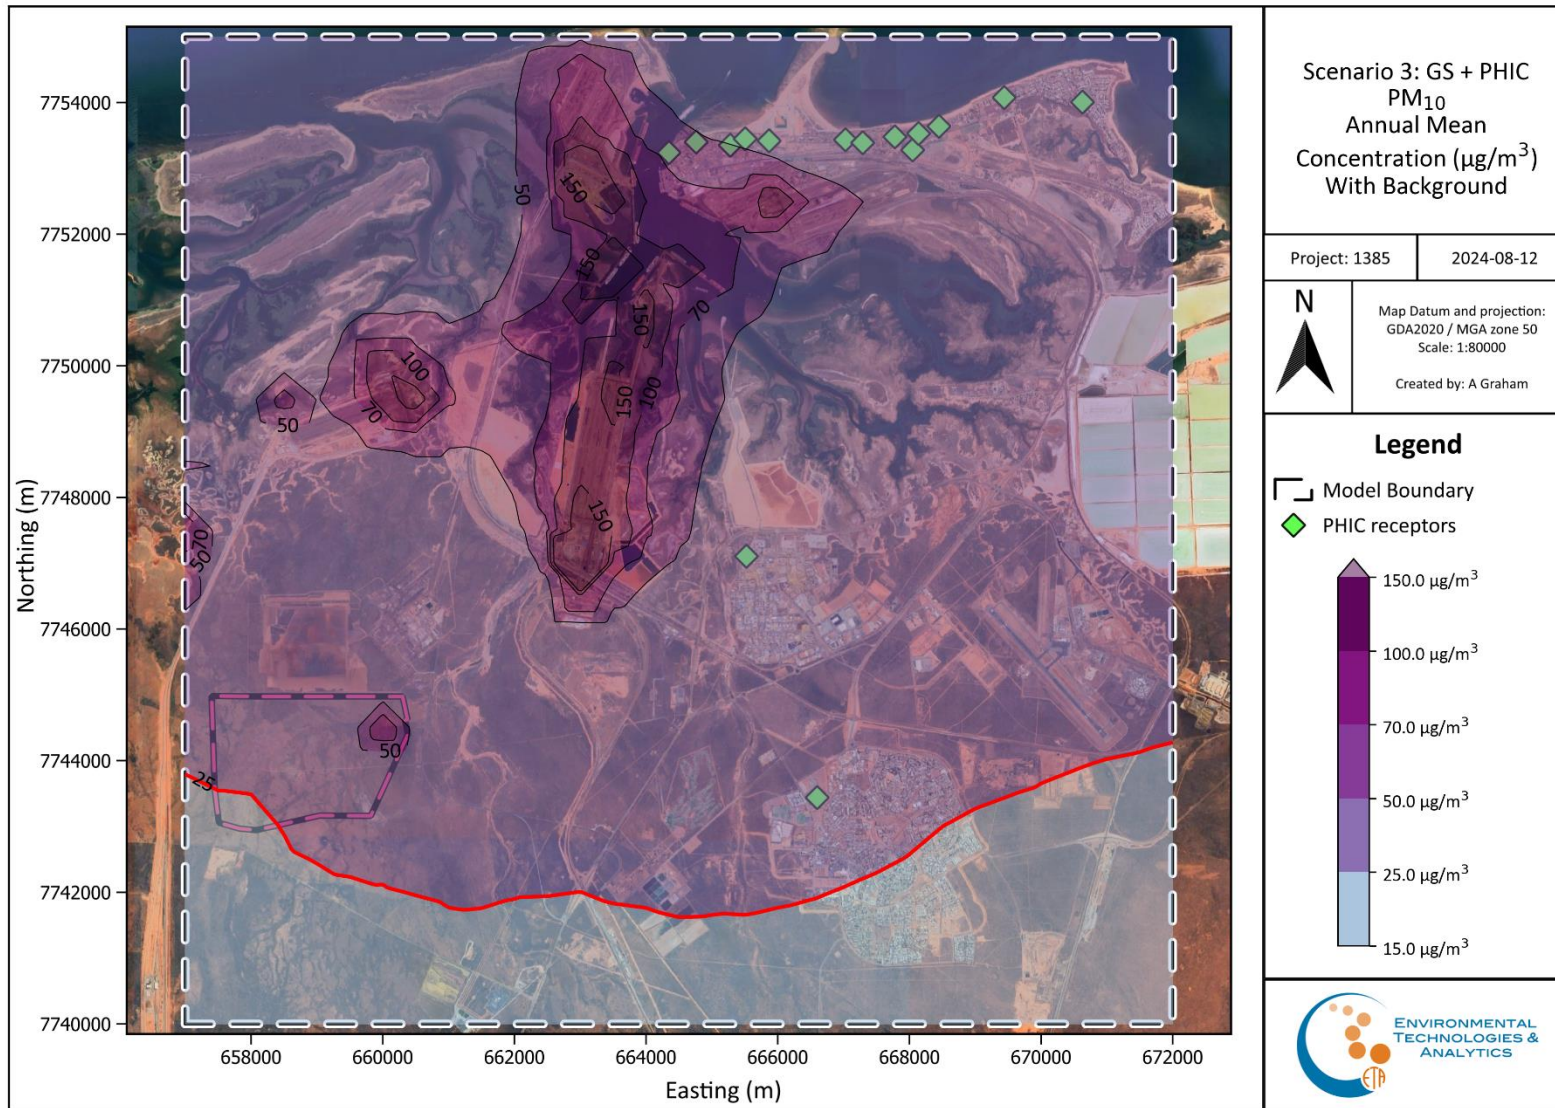


Figure 4-12: Indicative annual average PM_{2.5} concentrations for PHIC existing and cumulative model

4.4 Comparison at Taplin St

For comparison purposes the predicted ground level concentrations at the Taplin St receptor are presented for each scenario in Table 4-7. At Taplin St:

- The Project activities are modelled to predict a maximum increase of 0.8 $\mu\text{g}/\text{m}^3$.
- There is no predicted change to the number of excursion of the criteria at the Taplin St receptor
- There is no predicted change to the maximum predicted 24-hour PM_{10} concentration at the Taplin St receptor.
- There are no predicted changes to the maximum predicted 24-hour PM_{10} concentration at either the Wedgefield or South Hedland receptors.

Table 4-7: Predicted 24-hour ground level concentrations of PM_{10} at Taplin St for the Project – 3.5 Mtpa

Statistic	Scenario 1	Scenario 2	Scenario 3
Maximum	200	0.8	200
99th percentile	74	0.5	74
95th percentile	57	0.3	57
90th percentile	51	0.2	51
75th percentile	43	0.1	43
Average	34.3	0.07	34.4
Count >70 $\mu\text{g}/\text{m}^3$	7	0	7

5 Conclusions

Port Hedland Green Steel Pty Ltd is evaluating the feasibility of developing a large-scale downstream processing capability at the Boodarie Strategic Industrial Area (BSIA) in Port Hedland, Western Australia. This development, the Australia Green Steel Project (the Project), will source magnetite concentrate from iron ore operations in the Pilbara to produce Hot Briquetted Iron (HBI) for export to customers who will convert the HBI into a low carbon emission steel overseas.

The Project will be developed in stages, with Stage 1 consisting of developing the Iron Ore Processing Facility consisting of a Pellet Plant which will consume approximately 3 - 3.5 million tonnes per annum (Mtpa) of iron ore (trucked in from iron ore operations in the Pilbara) and a HBI Plant which will further process approximately 2 Mtpa of the pellets into HBI.

The scenarios considered are:

- Scenario 1: Base case, PHIC network emissions with background (not including the Project)
- Scenario 2: The Project without background
- Scenario 3: Cumulative model of PHIC and the Project with background.

Of which, modelling was required for Scenario 2 emissions which were then integrated with existing modelling for Scenario 3.

Modelling was undertaken using the atmospheric dispersion AERMOD configured in accordance with the work undertaken as part of the PHIC CAM including meteorology, receptors, background concentrations and existing and approved operations in the region.

The results of the modelling, at selected receptors, predict for the:

- Standalone scenario (i.e. The Project in isolation of other emission sources and no background):
 - For PM₁₀:
 - At the Taplin St receptor all of the predicted 24-hour averaged PM₁₀ concentrations are below 1 µg/m³.
 - The highest predicted impact will be 3.2 µg/m³ at the South Hedland receptor, with the lower percentile results being significantly lower.
 - For PM_{2.5}:
 - At the Taplin St receptor all of the predicted 24-hour averaged PM_{2.5} concentrations are well below 1 µg/m³.
 - The highest predicted impact will be 0.9 µg/m³ at the South Hedland receptor, with the lower percentile results being significantly lower.
- Scenario 3 which is a cumulative model of the PHIC network including the Project and with background, for both PM₁₀ and PM_{2.5}:
 - There is no predicted change to the number of excursion of the criteria at the Taplin St receptor
 - There is no predicted change to the maximum predicted 24-hour concentration at the Taplin St receptor.
 - There are no predicted changes to the maximum predicted 24-hour concentration at either the Wedgefield or South Hedland receptors.

6 References

- DoE. (2006). Air Quality Modelling Guidance Notes. Department of Environment, Western Australia.
- DSD. (2010). Port Hedland Air Quality and Noise Management Plan, The Port Hedland Dust Management Taskforce Report. Department of State Development, Government of Western Australia
- DSD (2017). Port Hedland Dust Management Taskforce Report to Government. Government of Western Australia, Department of State Development, Government of Western Australia.
- DWER (2018). Industry Regulation fact sheet: Managing Dust in Port Hedland. Available online at: https://www.der.wa.gov.au/images/documents/our-work/community-updates/port-hedland/DWER_DOH_Fact_Sheet_-_Port_Hedland_air_quality.pdf
- DWER (2021). Port Hedland Regulatory Strategy. May 2021.
- DWER (2021b). L4513/1969/18 Application for licence Amendment.
- Environment Australia (2012). National Pollutant Inventory Emission Estimation Technique Manual for Mining Version 3.1. Available online at: <http://www.npi.gov.au/system/files/resources/7e04163a-12ba-6864-d19a-f57d960aae58/files/mining.pdf>
- NEPC (2016). Variation to the National Environment protection (Ambient Air Quality) Measure - Impact statement.
- PEL (2015). Port Hedland Cumulative Air Model - Model Comparison. Report prepared by Pacific Environment for the Port Hedland Industries Council. Perth. Western Australia, Australia
- Perry, S.G., A.J. Cimorelli, et al. (2005). AERMOD: A Dispersion Model for Industrial Source Applications. Part II: Model Performance against 17 Field Study Databases. Journal of Applied Meteorology 44(5):694-708.
- SKM (2003). Aggregated Emission Inventory for the Pilbara Airshed. Report prepared for the Department of Environmental Protection, Perth, Western Australia, Australia.
- SKM (2005). Improvement of NPI Fugitive Particulate Matter Emission Estimation Techniques. Available online at <http://www.npi.gov.au/system/files/resources/d9d46a4c-f76e-fdc4-5d59-fd3f8181c5b8/files/pm10may05.pdf>

7 Acronyms and Glossary

Acronym	Description
BWS	Belt wash station
CAM	Cumulative Air Model
CVR	Conveyor
DWER	Department of Water and Environmental Regulation
EE	Emissions estimation
EETM	Emissions Estimation Technique Manual
EF	Emission factor
EPAV	Environmental Protection Authority Victoria, Australia
ETA	Environmental Technologies & Analytics Pty Ltd
FEL	Front end loader
Fortescue	Fortescue Metals Group
GLC	Ground Level Concentration
g/s	grams per second
h/yr	Hours per year
kg	kilogram
kg/t	kilogram per tonne
kg/yr	kilograms per year
km	kilometre
m	metre
m/s	metres per second
mm	millimetre
MRL	Mineral Resources Limited

Acronym	Description
Mt	Million tonnes
Mtpa	Million tonnes per annum
NEPM	National Environmental Protection Measure
NPI	National Pollutant Inventory
NSW	New South Wales
NWI	North West Infrastructure
PHIC	Port Hedland Industries Council
PM	Particulate matter, small particles and liquid droplets that can remain suspended in air.
PM _{2.5}	Particulate matter with an aerodynamic diameter of 10 µm or less.
PM ₁₀	Particulate matter with an aerodynamic diameter of 2.5 µm or less.
PPA	Pilbara Ports Authority
t	Tonnes
t/h	Tonnes per hour
tpa	tonnes per annum
tph	tonnes per hour
TS	Transfer station
TSP	Total suspended particulates
µg/m ³	micro grams (one millionth of a gram) per cubic metre
µm	micrometre


8 Appendices

Appendix A – PHIC CAM Meteorology.....	41
Appendix B – Emission Parameters	43
Appendix C – Emission Rates	44
Appendix D – Model Results.....	45
Appendix E – Model input file	47

Appendix A – PHIC CAM Meteorology


The full details on the meteorological file used in the assessment are contained in the PHIC CAM model comparison report (PEL, 2015). The following sections broadly outline the characteristics of the PHIC CAM meteorological file.

The diurnal statistics of the mixing height are presented in Appendix Figure 1. From this figure it is apparent that there is a gradual increase during the day followed by a marked decline in the average mixing height in the late afternoon. This decrease is due to the transition from convective to mechanical mixing.

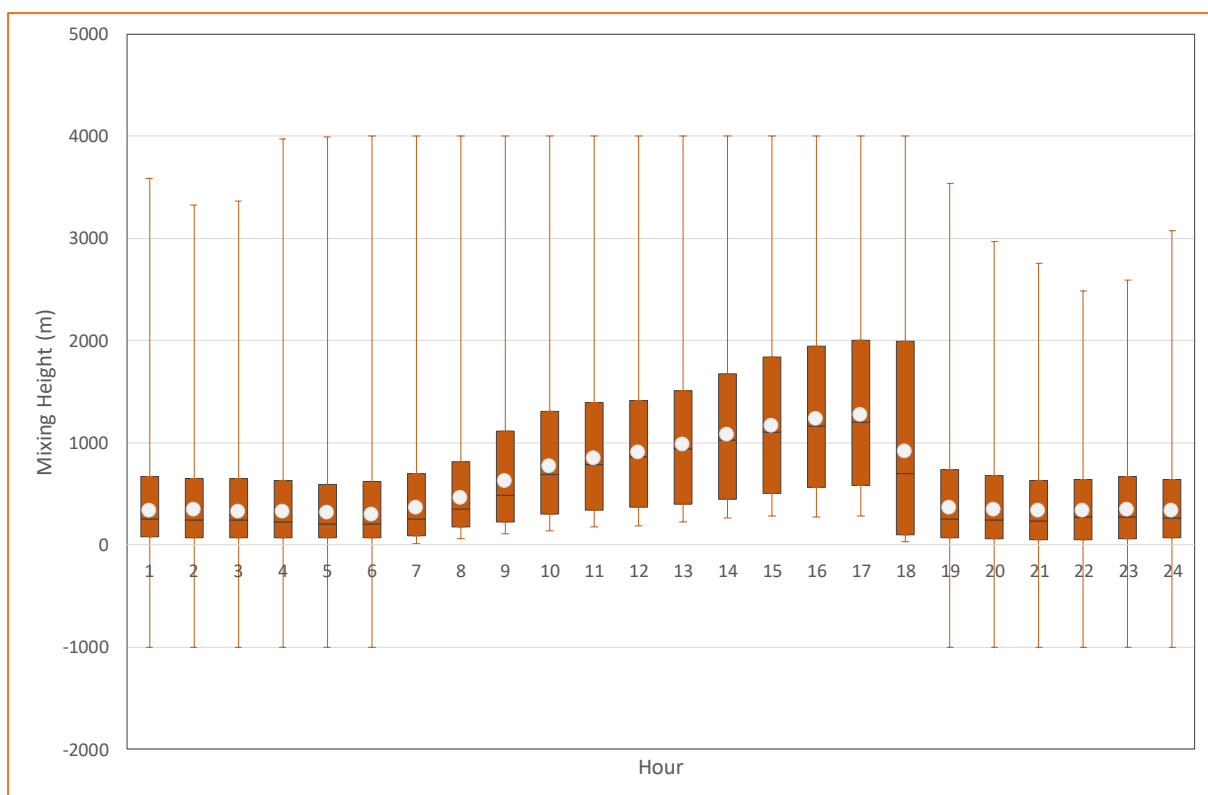


Appendix Figure 1: AERMET mixing height for the PHIC CAM

A plot of the atmospheric stability, by hour of the day, is presented in Appendix Figure 2. The profile shows that neutral (D) and unstable (A – C) atmospheric conditions occur during the daytime, with the night dominated by stable conditions (E – F). This is further confirmed in Appendix Figure 3 which shows the statistics, by hour of the day, of the Monin-Obukhov length.

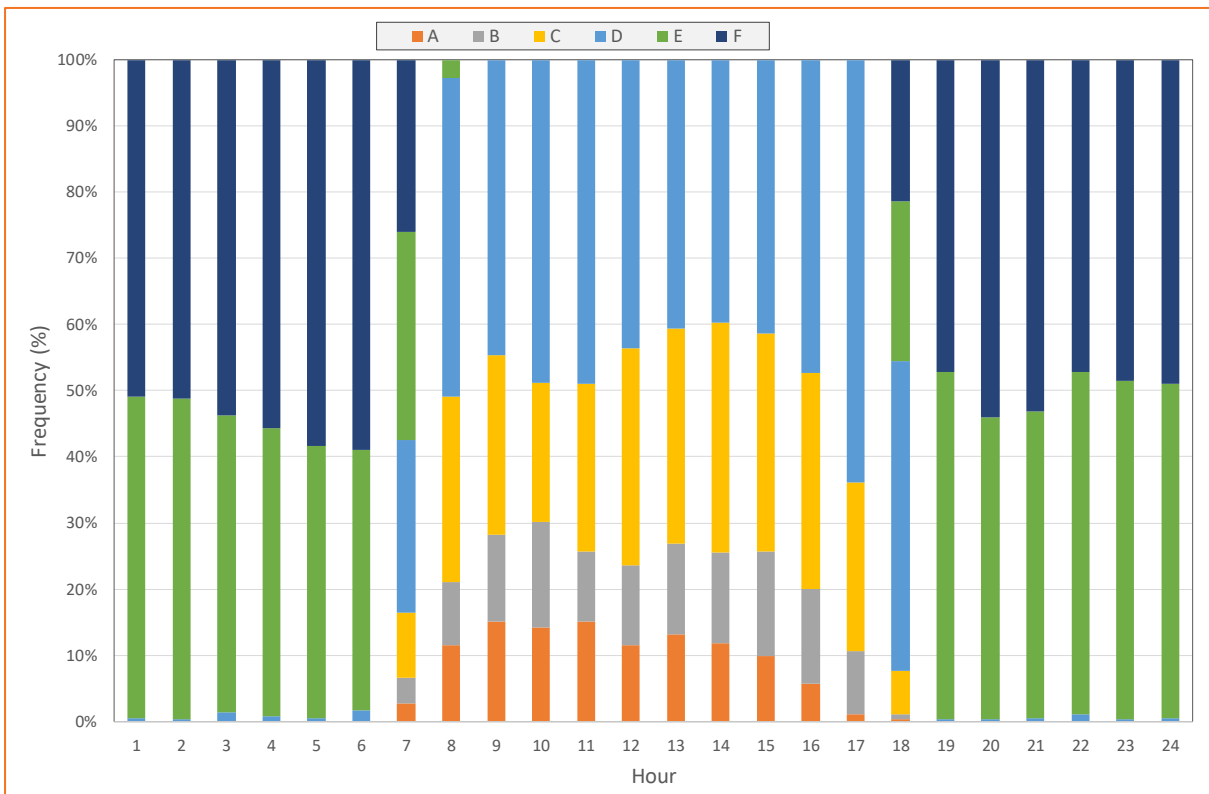

Appendix Figure 2: Golder plot of stability classes by time of day

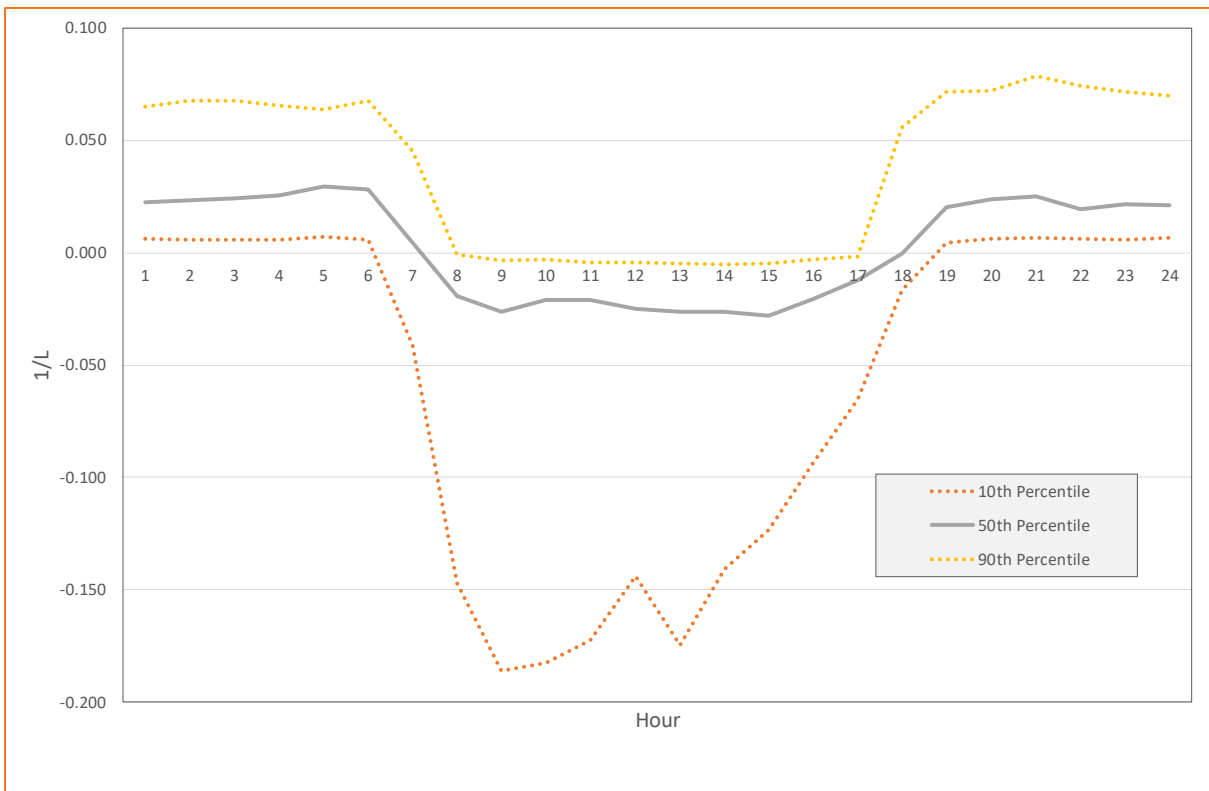

Appendix Figure 3: Hourly statistics of the Monin-Obukhov length

Appendix B – Emission Parameters

Appendix Table 1: Emission source parameters

ID	Easting (m)	Northing (m)	Height (m)	Sigma Y (m)	Sigma Z (m)
UnLoad1	660,114	7,744,782	2	3	0.93
UnLoad2	660,113	7,744,664	2	3	0.93
UnLoad3	660,112	7,744,543	2	2	0.93
UnLoad4	660,112	7,744,423	2	12	0.93
TS1	660,092	7,744,642	3	12	1.4
TS2	660,093	7,744,767	3	2	1.4
TS4	660,087	7,744,403	3	70	1.4
TS5	660,086	7,744,525	3	70	1.4
TS3	660,089	7,744,892	3	138	1.4
TS6	659,982	7,744,892	3	137	1.4
TS7	659,936	7,744,891	3	70	1.4
TS8	659,685	7,744,737	3	70	1.4
TS10	659,818	7,744,449	3	2	1.4
TS11	659,817	7,744,363	3	12	1.4
TS13	659,787	7,744,362	3	12	1.4
TS14	660,071	7,744,332	3	2	1.4
TS15	659,738	7,744,327	3	2	1.4
TS9	659,670	7,744,442	3	35	1.4
TS12	659,856	7,744,363	3	35	1.4
Load1	659,983	7,744,364	4	35	2.33
Load2	660,015	7,744,953	4	35	2.33
Stacker1	660,073	7,744,590	8	35	3.72
Reclaimer1	660,034	7,744,569	8	2	3.72
Stacker2	659,982	7,744,764	8	12	3.72
Reclaimer2	659,957	7,744,733	8	12	3.72
Stacker3	659,854	7,744,724	8	25	3.72
Reclaimer3	659,891	7,744,699	8	25	3.72

Appendix Table 2: Wind Erosion Coordinates

Source ID	Eastings				Northings			
	1	2	3	4	1	2	3	4
HBI_Yard	660009	660073	660073	660009	7744610	7744610	7744546	7744546

Appendix Table 3: Wind Erosion Parameters

Source ID	Effective Radius	Effective Ht	Sigma Z
HBI_Yard	35.7	1.5	0.7

Appendix C – Emission Rates

Appendix Table 4: Emission statistics for Scenario 2: The Project (g/s)

ID	Maximum	99th Percentile	95th Percentile	90th Percentile	70th Percentile	Average
Load1	0.71	0.71	0.71	0.71	0.71	0.57
Load2	0.95	0.95	0.95	0.95	0.95	0.76
Reclaimer1	0.16	0.16	0.16	0.16	0.16	0.13
Reclaimer2	0.02	0.02	0.02	0.02	0.02	0.01
Reclaimer3	0.01	0.01	0.01	0.01	0.01	0.01
Stacker1	0.16	0.16	0.16	0.16	0.16	0.13
Stacker2	0.02	0.02	0.02	0.02	0.02	0.01
Stacker3	0.01	0.01	0.01	0.01	0.01	0.01
TS1	0.06	0.06	0.06	0.06	0.06	0.04
TS10	0.22	0.22	0.22	0.22	0.22	0.18
TS11	0.22	0.22	0.22	0.22	0.22	0.18
TS12	0.19	0.19	0.19	0.19	0.19	0.15
TS13	0.13	0.13	0.13	0.13	0.13	0.10
TS14	0.10	0.10	0.10	0.10	0.10	0.08
TS15	0.10	0.10	0.10	0.10	0.10	0.08
TS2	0.06	0.06	0.06	0.06	0.06	0.04
TS3	0.06	0.06	0.06	0.06	0.06	0.04
TS4	0.06	0.06	0.06	0.06	0.06	0.04
TS5	0.06	0.06	0.06	0.06	0.06	0.04
TS6	0.06	0.06	0.06	0.06	0.06	0.04
TS7	0.06	0.06	0.06	0.06	0.06	0.04
TS8	0.06	0.06	0.06	0.06	0.06	0.04
TS9	0.02	0.02	0.02	0.02	0.02	0.02
UnLoad1	0.03	0.03	0.03	0.03	0.03	0.02
UnLoad2	0.03	0.03	0.03	0.03	0.03	0.02
UnLoad3	0.03	0.03	0.03	0.03	0.03	0.02
UnLoad4	0.03	0.03	0.03	0.03	0.03	0.02
HBI_Yard	9.08	1.28	0.27	0.15	0.01	0.078

Appendix D – PM₁₀ Model Results

Appendix Table 5: Predicted 24-hour ground level concentrations of PM₁₀ for Scenario 1 Base Case, PHIC only, with background (µg/m³)

Source	Harbour	Richardson St	BMX	Kingsmill St	Hospital	Taplin St	St Cecilia's	Holiday Inn	Shop	All Seasons	Council	Neptune PI	Primary School	South Hedland	Wedgefield
Maximum	217	212	223	222	217	200	198	195	195	194	194	193	192	187	193
99 th percentile	134	138	103	96	91	74	70	66	64	65	64	61	59	61	99
95 th percentile	106	89	81	79	73	57	56	52	53	51	49	44	42	46	72
90 th percentile	89	79	73	68	63	51	49	46	48	45	44	40	38	39	63
75 th percentile	73	62	58	56	52	43	42	40	40	39	37	34	33	30	48
Average	60.4	52.6	48.8	45.7	43.0	34.3	33.3	31.4	31.5	30.4	29.5	27.3	26.3	25.5	37.5
count > 70	109	60	42	31	25	7	4	3	2	3	1	1	1	1	22

Appendix Table 6: Predicted 24-hour ground level concentrations of PM₁₀ for Scenario 2: The Project only without background (µg/m³)

Source	Harbour	Richardson St	BMX	Kingsmill St	Hospital	Taplin St	St Cecilia's	Holiday Inn	Shop	All Seasons	Council	Neptune PI	Primary School	South Hedland	Wedgefield
Maximum	1.1	0.9	1.0	1.0	0.8	0.8	0.8	0.8	0.9	1.0	1.0	0.7	0.5	3.2	1.9
99 th percentile	0.8	0.8	0.7	0.6	0.6	0.5	0.5	0.6	0.5	0.5	0.5	0.4	0.3	2.3	1.4
95 th percentile	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	1.6	1.0
90 th percentile	0.4	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	1.1	0.7
75 th percentile	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.4	0.4
Average	0.11	0.10	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.33	0.25
count > 70	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Appendix Table 7: Predicted 24-hour ground level concentrations of PM₁₀ for Scenario 3: PHIC and the Project (µg/m³)

Source	Harbour	Richardson St	BMX	Kingsmill St	Hospital	Taplin St	St Cecilia's	Holiday Inn	Shop	All Seasons	Council	Neptune PI	Primary School	South Hedland	Wedgefield
Maximum	217	212	223	222	217	200	198	195	196	194	194	193	192	187	194
99 th percentile	134	138	103	97	92	74	70	66	64	65	64	61	59	62	99
95 th percentile	106	89	81	79	73	57	56	52	53	51	49	44	42	47	72
90 th percentile	89	79	73	68	63	51	49	47	48	45	44	40	38	39	63
75 th percentile	73	62	58	56	52	43	42	40	40	39	37	34	33	30	49
Average	60.6	52.7	48.9	45.7	43.0	34.4	33.3	31.5	31.5	30.5	29.6	27.4	26.3	25.8	37.8
count > 70	109	61	43	31	25	7	4	3	2	3	1	1	1	1	23

Appendix E – PM_{2.5} Model Results

Appendix Table 8: Predicted 24-hour ground level concentrations of PM₁₀ for Scenario 1 Base Case, PHIC only, with background (µg/m³)

Source	Harbour	Richardson St	BMX	Kingsmill St	Hospital	Taplin St	St Cecilia's	Holiday Inn	Shop	All Seasons	Council	Neptune PI	Primary School	South Hedland	Wedgefield
Maximum	61	59	62	62	61	56	55	55	55	54	54	54	54	52	54
99 th percentile	38	39	29	27	26	21	20	18	18	18	18	17	17	17	28
95 th percentile	30	25	23	22	20	16	16	15	15	14	14	12	12	13	20
90 th percentile	25	22	21	19	18	14	14	13	13	13	12	11	11	11	18
75 th percentile	20	16	16	15	14	12	11	11	11	10	10	9	9	8	13
Average	16.9	14.7	13.7	12.8	12.0	9.6	9.3	8.8	8.8	8.5	8.3	7.6	7.4	7.1	10.5
count > 25	35	18	9	6	5	1	1	1	1	1	1	1	1	1	5

Appendix Table 9: Predicted 24-hour ground level concentrations of PM₁₀ for Scenario 2: The Project only without background (µg/m³)

Source	Harbour	Richardson St	BMX	Kingsmill St	Hospital	Taplin St	St Cecilia's	Holiday Inn	Shop	All Seasons	Council	Neptune PI	Primary School	South Hedland	Wedgefield
Maximum	0.31	0.26	0.29	0.28	0.23	0.23	0.21	0.23	0.25	0.28	0.28	0.19	0.14	0.9	0.54
99 th percentile	0.23	0.23	0.19	0.18	0.17	0.14	0.14	0.15	0.14	0.13	0.14	0.11	0.09	0.63	0.38
95 th percentile	0.15	0.14	0.12	0.11	0.11	0.08	0.07	0.08	0.07	0.08	0.08	0.06	0.05	0.44	0.27
90 th percentile	0.1	0.09	0.08	0.07	0.07	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.04	0.31	0.21
75 th percentile	0.03	0.03	0.03	0.02	0.02	0.02	0.03	0.02	0.03	0.02	0.02	0.02	0.01	0.11	0.1
Average	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.09	0.07
count > 25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Appendix Table 10: Predicted 24-hour ground level concentrations of PM₁₀ for Scenario 3: PHIC and the Project (µg/m³)

Source	Harbour	Richardson St	BMX	Kingsmill St	Hospital	Taplin St	St Cecilia's	Holiday Inn	Shop	All Seasons	Council	Neptune PI	Primary School	South Hedland	Wedgefield
Maximum	61	59	62	62	61	56	55	55	55	54	54	54	54	52	54
99 th percentile	38	39	29	27	26	21	20	18	18	18	18	17	17	17	28
95 th percentile	30	25	23	22	20	16	16	15	15	14	14	12	12	13	20
90 th percentile	25	22	20	19	18	14	14	13	13	13	12	11	11	11	18
75 th percentile	20	17	16	16	15	12	12	11	11	11	10	10	9	8	14
Average	17.0	14.8	13.7	12.8	12.1	9.6	9.3	8.8	8.8	8.5	8.3	7.7	7.4	7.2	10.6
count > 25	35	18	9	6	5	1	1	1	1	1	1	1	1	1	5

Appendix F – Model input file

```

AERMOD
**
*****
**
** AERMOD Input Produced by:
** AERMOD View Ver. 12.0.0
** Lakes Environmental Software Inc.
** Date: 8/08/2024
** File: C:\Projects\1385_GreenSteel\Run1_Receptor\Run1_all.ADI
**
*****
**
**
*****
** AERMOD Control Pathway
*****
**
**
CO STARTING
TITLEONE Run6a AERMET - Green Steel
TITLETWO 1385 Run 1, Receptors, 7/8/2024
MODELOPT CONC DRYDPLT WETDPLT ALPHA
AVERTIME 1 24 ANNUAL
POLLUTID PM_10
RUNORNOT RUN
LOW_WIND 0.2 0.2828 0.1 0.02 24 0
ERRORFIL Run1_all.err
CO FINISHED
**
*****
** AERMOD Source Pathway
*****
**
**
SO STARTING
** Source Location **
** Source ID - Type - X Coord. - Y Coord. **
LOCATION UNLOAD1      VOLUME      660114  7744782      10.400
LOCATION UNLOAD2      VOLUME      660113  7744664      11.300
LOCATION UNLOAD3      VOLUME      660112  7744543        9.640
LOCATION UNLOAD4      VOLUME      660112  7744423      11.720
LOCATION TS1          VOLUME      660092  7744642      11.050
LOCATION TS2          VOLUME      660093  7744767      10.000
LOCATION TS4          VOLUME      660087  7744403      12.770
LOCATION TS5          VOLUME      660086  7744525        9.430
LOCATION TS3          VOLUME      660089  7744892        9.070
LOCATION TS6          VOLUME      659982  7744892        9.030
LOCATION TS7          VOLUME      659936  7744891      10.100
LOCATION TS8          VOLUME      659685  7744737      11.950
LOCATION TS10         VOLUME      659818  7744449      10.130
LOCATION TS11         VOLUME      659817  7744363      11.510
LOCATION TS13         VOLUME      659787  7744362      11.060
LOCATION TS14         VOLUME      660071  7744332        9.890
LOCATION TS15         VOLUME      659738  7744327      13.330

```


LOCATION	TS9	VOLUME	659670	7744442	11.930
LOCATION	TS12	VOLUME	659856	7744363	11.910
LOCATION	LOAD1	VOLUME	659983	7744364	10.740
LOCATION	LOAD2	VOLUME	660015	7744953	9.050
LOCATION	STACKER1	VOLUME	660073	7744590	10.000
LOCATION	RECLAIMER1	VOLUME	660034	7744569	12.340
LOCATION	STACKER2	VOLUME	659982	7744764	10.520
LOCATION	RECLAIMER2	VOLUME	659957	7744733	11.570
LOCATION	STACKER3	VOLUME	659854	7744724	12.000
LOCATION	RECLAIMER3	VOLUME	659891	7744699	12.230
LOCATION	HBI_YARD	VOLUME	660040	7744578	12.400
** Source Parameters **					
SRCPARAM	UNLOAD1	1.0	2.000	3.000	0.930
SRCPARAM	UNLOAD2	1.0	2.000	3.000	0.930
SRCPARAM	UNLOAD3	1.0	2.000	2.000	0.930
SRCPARAM	UNLOAD4	1.0	2.000	12.000	0.930
SRCPARAM	TS1	1.0	3.000	12.000	1.400
SRCPARAM	TS2	1.0	3.000	2.000	1.400
SRCPARAM	TS4	1.0	3.000	70.000	1.400
SRCPARAM	TS5	1.0	3.000	70.000	1.400
SRCPARAM	TS3	1.0	3.000	138.000	1.400
SRCPARAM	TS6	1.0	3.000	137.000	1.400
SRCPARAM	TS7	1.0	3.000	70.000	1.400
SRCPARAM	TS8	1.0	3.000	70.000	1.400
SRCPARAM	TS10	1.0	3.000	2.000	1.400
SRCPARAM	TS11	1.0	3.000	12.000	1.400
SRCPARAM	TS13	1.0	3.000	12.000	1.400
SRCPARAM	TS14	1.0	3.000	2.000	1.400
SRCPARAM	TS15	1.0	3.000	2.000	1.400
SRCPARAM	TS9	1.0	3.000	35.000	1.400
SRCPARAM	TS12	1.0	3.000	35.000	1.400
SRCPARAM	LOAD1	1.0	4.000	35.000	2.330
SRCPARAM	LOAD2	1.0	4.000	35.000	2.330
SRCPARAM	STACKER1	1.0	8.000	35.000	3.720
SRCPARAM	RECLAIMER1	1.0	8.000	2.000	3.720
SRCPARAM	STACKER2	1.0	8.000	12.000	3.720
SRCPARAM	RECLAIMER2	1.0	8.000	12.000	3.720
SRCPARAM	STACKER3	1.0	8.000	25.000	3.720
SRCPARAM	RECLAIMER3	1.0	8.000	25.000	3.720
SRCPARAM	HBI_YARD	1.0	1.500	35.000	0.698
PARTDIAM	UNLOAD1	1	4	7	9
PARTDIAM	UNLOAD2	1	4	7	9
PARTDIAM	UNLOAD3	1	4	7	9
PARTDIAM	UNLOAD4	1	4	7	9
PARTDIAM	TS1	1	4	7	9
PARTDIAM	TS2	1	4	7	9
PARTDIAM	TS4	1	4	7	9
PARTDIAM	TS5	1	4	7	9
PARTDIAM	TS3	1	4	7	9
PARTDIAM	TS6	1	4	7	9
PARTDIAM	TS7	1	4	7	9
PARTDIAM	TS8	1	4	7	9
PARTDIAM	TS10	1	4	7	9
PARTDIAM	TS11	1	4	7	9
PARTDIAM	TS13	1	4	7	9
PARTDIAM	TS14	1	4	7	9
PARTDIAM	TS15	1	4	7	9

PARTDIAM TS9 1 4 7 9
 PARTDIAM TS12 1 4 7 9
 PARTDIAM LOAD1 1 4 7 9
 PARTDIAM LOAD2 1 4 7 9
 PARTDIAM STACKER1 1 4 7 9
 PARTDIAM RECLAIMER1 1 4 7 9
 PARTDIAM STACKER2 1 4 7 9
 PARTDIAM RECLAIMER2 1 4 7 9
 PARTDIAM STACKER3 1 4 7 9
 PARTDIAM RECLAIMER3 1 4 7 9
 PARTDIAM HBI_YARD 1 4 7 9
 MASSFRAX UNLOAD1 0.31 0.26 0.23 0.2
 MASSFRAX UNLOAD2 0.31 0.26 0.23 0.2
 MASSFRAX UNLOAD3 0.31 0.26 0.23 0.2
 MASSFRAX UNLOAD4 0.31 0.26 0.23 0.2
 MASSFRAX TS1 0.31 0.26 0.23 0.2
 MASSFRAX TS2 0.31 0.26 0.23 0.2
 MASSFRAX TS4 0.31 0.26 0.23 0.2
 MASSFRAX TS5 0.31 0.26 0.23 0.2
 MASSFRAX TS3 0.31 0.26 0.23 0.2
 MASSFRAX TS6 0.31 0.26 0.23 0.2
 MASSFRAX TS7 0.31 0.26 0.23 0.2
 MASSFRAX TS8 0.31 0.26 0.23 0.2
 MASSFRAX TS10 0.31 0.26 0.23 0.2
 MASSFRAX TS11 0.31 0.26 0.23 0.2
 MASSFRAX TS13 0.31 0.26 0.23 0.2
 MASSFRAX TS14 0.31 0.26 0.23 0.2
 MASSFRAX TS15 0.31 0.26 0.23 0.2
 MASSFRAX TS9 0.31 0.26 0.23 0.2
 MASSFRAX TS12 0.31 0.26 0.23 0.2
 MASSFRAX LOAD1 0.31 0.26 0.23 0.2
 MASSFRAX LOAD2 0.31 0.26 0.23 0.2
 MASSFRAX STACKER1 0.31 0.26 0.23 0.2
 MASSFRAX RECLAIMER1 0.31 0.26 0.23 0.2
 MASSFRAX STACKER2 0.31 0.26 0.23 0.2
 MASSFRAX RECLAIMER2 0.31 0.26 0.23 0.2
 MASSFRAX STACKER3 0.31 0.26 0.23 0.2
 MASSFRAX RECLAIMER3 0.31 0.26 0.23 0.2
 MASSFRAX HBI_YARD 0.31 0.26 0.23 0.2
 PARTDENS UNLOAD1 1 1 1 1
 PARTDENS UNLOAD2 1 1 1 1
 PARTDENS UNLOAD3 1 1 1 1
 PARTDENS UNLOAD4 1 1 1 1
 PARTDENS TS1 1 1 1 1
 PARTDENS TS2 1 1 1 1
 PARTDENS TS4 1 1 1 1
 PARTDENS TS5 1 1 1 1
 PARTDENS TS3 1 1 1 1
 PARTDENS TS6 1 1 1 1
 PARTDENS TS7 1 1 1 1
 PARTDENS TS8 1 1 1 1
 PARTDENS TS10 1 1 1 1
 PARTDENS TS11 1 1 1 1
 PARTDENS TS13 1 1 1 1
 PARTDENS TS14 1 1 1 1
 PARTDENS TS15 1 1 1 1
 PARTDENS TS9 1 1 1 1

```

PARTDENS TS12 1 1 1 1
PARTDENS LOAD1 1 1 1 1
PARTDENS LOAD2 1 1 1 1
PARTDENS STACKER1 1 1 1 1
PARTDENS RECLAIMER1 1 1 1 1
PARTDENS STACKER2 1 1 1 1
PARTDENS RECLAIMER2 1 1 1 1
PARTDENS STACKER3 1 1 1 1
PARTDENS RECLAIMER3 1 1 1 1
PARTDENS HBI_YARD 1 1 1 1
HOUREMIS HourlyEmissions_pm10_VerA.txt UNLOAD1 UNLOAD2 UNLOAD3
HOUREMIS HourlyEmissions_pm10_VerA.txt UNLOAD4 TS1 TS2
HOUREMIS HourlyEmissions_pm10_VerA.txt TS4 TS5 TS3
HOUREMIS HourlyEmissions_pm10_VerA.txt TS6 TS7 TS8
HOUREMIS HourlyEmissions_pm10_VerA.txt TS10 TS11 TS13
HOUREMIS HourlyEmissions_pm10_VerA.txt TS14 TS15 TS9
HOUREMIS HourlyEmissions_pm10_VerA.txt TS12 LOAD1 LOAD2
HOUREMIS HourlyEmissions_pm10_VerA.txt STACKER1 RECLAIMER1 STACKER2
HOUREMIS HourlyEmissions_pm10_VerA.txt RECLAIMER2 STACKER3 RECLAIMER3
HBI_YARD
SRCGROUP ALL
SO FINISHED
**
*****
** AERMOD Receptor Pathway
*****
**
**
RE STARTING
INCLUDED Run1_all.rou
RE FINISHED
**
*****
** AERMOD Meteorology Pathway
*****
**
**
ME STARTING
SURFFILE 6866_Run6a_6Feb2015.SFC
PROFFILE 6866_Run6a_6Feb2015.PFL
SURFDATA 0 2013
UAIRDATA 54321 2013
SITEDATA 1 2013
PROFBASE 9.0 METERS
ME FINISHED
**
*****
** AERMOD Output Pathway
*****
**
**
OU STARTING
RECTABLE ALLAVE 1ST
RECTABLE 1 1ST
RECTABLE 24 1ST
POSTFILE 1 ALL PLOT Run1_all.AD\01_GALL.POS 31
POSTFILE 24 ALL PLOT Run1_all.AD\24_GALL.POS 32

```

```
POSTFILE ANNUAL ALL PLOT Run1_all.AD\AN_GALL.POS 33
** Auto-Generated Plotfiles
PLOTFILE 1 ALL 1ST Run1_all.AD\01H1GALL.PLT 34
PLOTFILE 24 ALL 1ST Run1_all.AD\24H1GALL.PLT 35
PLOTFILE ANNUAL ALL Run1_all.AD\AN00GALL.PLT 36
SUMMFILE Run1_all.sum
OU FINISHED
**
*****
** Project Parameters
*****
** PROJCTN  CoordinateSystemUTM
** DESCPTN  UTM: Universal Transverse Mercator
** DATUM    World Geodetic System 1984
** DTMRGN   Global Definition
** UNITS    m
** ZONE     -50
** ZONEINX  0
**
```